



TRAC-MASTER®

Avant Garde

WISHBONE LOW VOLTAGE

T480, T484, and T485

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

The sleek sculptured look and style of Wishbone fixtures is unparalleled in the industry. The elegance is carried through the entire design for a fresh, contemporary appeal.

Construction Molded polycarbonate yoke with die-formed steel ring.

Aiming Greater than 360° horizontal rotation eliminates aiming dead spots
 • 90° vertical aiming capability • Vertical aiming locking screws secure lampholder position during relamping cycles.

Transformer Must be ordered separately • Compatible with T537 or T538 12V electronic transformer for halogen lamps (D1.2.1) • Compatible with T537U universal 12V electronic transformer for LED or halogen lamps (D1.2.5)
 • Compatible with T539 12V electronic transformer for halogen lamps (D1.2.0) • Compatible with T542 or T543 12V magnetic transformer for LED or halogen lamps (D1.2.0).

Labels UL listed, CSA certified.

Product specifications subject to change without notice.



Low Voltage MR16

Lamp 12V, 50W maximum MR16 GU5.3/GX5.3 bi-pin.




Socket Ceramic bi-pin.

Catalog Number	Finish	Lamp
T480WH	White	50W MR16 max.
T480BL	Black	50W MR16 max.
T480SL	Silver w/ Black Adjusting Buttons	50W MR16 max.

ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T558BL	Black Snoot	T556BL	Black Eyebrow	T74BL	Black Barn Door
T557	Prismatic Spread Lens	T559	Linear Spread Lens	T551-5	Color Filters
T5501-18	Dichroic Filters	T5520	Diffusion Lens	T5521	Uniformity Lens
T5522	UV Filter	T5559BL	Hexcell Louver		

See Specification sheet [D1.2.2](#) for details.



TRAC-MASTER®

Avant Garde

WISHBONE LOW VOLTAGE**T480, T484, and T485****PRODUCT DESCRIPTION**

The sleek sculptured look and style of Wishbone fixtures is unparalleled in the industry. The elegance is carried through the entire design for a fresh, contemporary appeal.

Construction Molded polycarbonate yoke with die-formed steel ring.

Aiming Greater than 360° horizontal rotation eliminates aiming dead spots
 • 90° vertical aiming capability • Vertical aiming locking screws secure lampholder position during relamping cycles.

Transformer Must be ordered separately • Compatible with T537 or T538 12V electronic transformer for halogen lamps (D1.2.1) • Compatible with T537U universal 12V electronic transformer for LED or halogen lamps (D1.2.5)
 • Compatible with T539 12V electronic transformer for halogen lamps (D1.2.0) • Compatible with T542 or T543 12V magnetic transformer for LED or halogen lamps (D1.2.0).

Labels UL listed, CSA certified.


Product specifications subject to change without notice.

Low Voltage PAR36

Lamp 12V, 50W maximum PAR36 G53 with push-on contacts.

Socket Snap-on terminal cover with contacts.

Catalog Number	Finish	Lamp
T484BL	Black	50W PAR36 max.

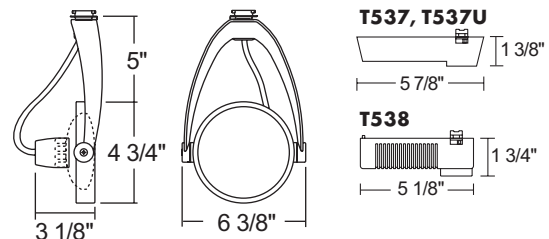
**Low Voltage AR111**

Lamp 12V, 75W maximum AR111 G53 with push-on contacts.

Socket Snap-on terminal cover with contacts.

Lens Glass lens included with each lampholder.

Catalog Number	Finish	Lamp
T485WH	White	75W AR111 max.
T485BL	Black	75W AR111 max.

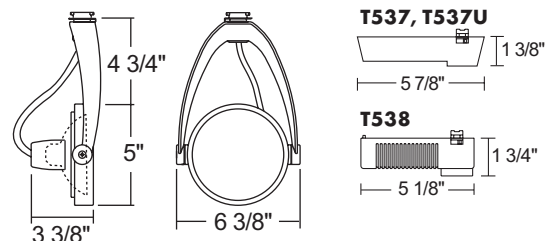**ACCESSORIES**

Cat. No.	Description	Cat. No.	Description
T587BL	Black Eyebrow	T579BL	Cube Cell Louver
T571-6	Color Filters	T5778	Linear Spread Lens
T5777	Prismatic Spread Lens	T5722	UV Filter
T5721	Uniformity Lens	T5718	Color Correction Filter

See specification sheet D1.2.2 for details.

Note: Filters and lenses require the use of three steel spring clips (supplied).