



SLOPE CEILING TC HOUSING

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

STANDARD SLOPE:

2/12 to 6/12 PITCH (9° to 27°)

INCANDESCENT LAMPS

TC926

PRODUCT DESCRIPTION

Slope ceiling TC Housing designed for use in non-insulated areas
 • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell
 • Adjustable to position lamp perpendicular to floor.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps or insulation
 • Union made
 • UL Listed/CSA certified
 • Trim No. 610 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Real Nail 3 Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings
 • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required
 • 24" expansion stop allows quick placement of fixture in standard grid spacing
 • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications
 • Bars captive to mounting frame
 • Edge-mounted for extra strength
 • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation
 • Quick-Loc slot and oversized locking set screw lock fixture in position
 • Bar hanger foot contoured to align to bottom of construction joist
 • Alternate mounting holes included.

Junction Box Pre-wired junction box provided with (5) ½" and (1) ¾" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out)
 • Junction box provided with removable access plates
 • Knockouts equipped with pryout slots.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame
 • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Housing TC housing, 22-gauge white painted steel with aluminum cap
 • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness
 • Designed to fit 2x8 or 2x10 construction.

DIMENSIONS

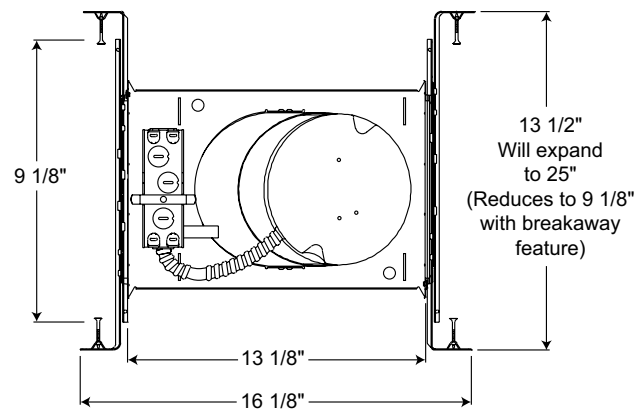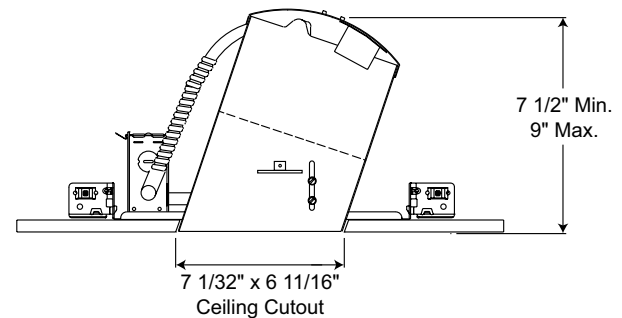

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
TC926	120V	A19/MR16/BR30/R30/PAR30/PAR30L/PAR38

SLOPE CEILING TC HOUSING

STANDARD SLOPE:

2/12 to 6/12 PITCH (9° to 27°)

INCANDESCENT LAMPS

TC926

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	610B-WH ◆ 610W-WH ◆	Lensed Abalite Black Baffle Lensed Abalite White Baffle	75W A19, 75W PAR30
	612C-WH 612G-WH 612B-WH 612HZ-WH 612HZ-SC 612W-WH 612WHZ-WH 612WHZ-ABZ	Multiplier Cone - Clear Alzak® Multiplier Cone - Gold Alzak® Multiplier Cone - Black Alzak® Multiplier Cone - Haze Multiplier Cone - Haze Multiplier Cone - White Multiplier Cone - Wheat Haze Multiplier Cone - Wheat Haze	75W PAR30, 150W PAR38, 85W BR30
	614B-WH 614B-SC 614B-ABZ 614B-BL 614W-WH	Downlight with Black Baffle Downlight with Black Baffle Downlight with Black Baffle Downlight with Black Baffle Downlight with White Baffle	150W PAR38
	616B-WH 616W-WH	Black Cylinder Spotlight with Black Baffle White Cylinder Spotlight with White Baffle	60W PAR16
	617W-WH	White Spotlight with White Baffle	50W MR16 supplied with magnetic transformer
	619B-WH 619W-WH	Eyeball in Black Baffle Eyeball in White Baffle	85W BR30

Trim Size: 7⁵/₈" O.D. (except Cat. Nos. 612 and 614 - 7³/₈" O.D.).

Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite,

PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White.

◆ UL Listed for use in wet location.