



# TRAC-MASTER®

Wall Wash/Floods

## MINI-BIAX® SERIES

**TMBX26**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

### PRODUCT DESCRIPTION

Mini-Biax compact fluorescent trac fixtures are an excellent energy efficient solution for residential, retail and commercial wall washing and display illumination. The wide distribution provides uniform illumination and focus on art and feature displays.

### PRODUCT SPECIFICATIONS

**Lamp** One 26W quad compact fluorescent lamp CFQ26/G24d  
• 2 pin base.

**Profile** Low profile design.

**Aiming** 90° vertical aiming capability • 358° horizontal rotation  
• Two locking knobs provided.

**Adapter** Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground  
• On/off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac • "Pull-up" contact to up position for two-circuit application.

**Materials** Computer contoured reflector • Sturdy extruded aluminum housing with die-cast aluminum end caps and textured paint.

**Ballast** 120V NPF magnetic ballast

**Reflector** Hammertone specular aluminum.



**Labels** UL listed, CSA certified.

Product specifications subject to change without notice.

### PRODUCT CODES

Catalog Number	Finish	Ballast	Wattage and Lamp
<b>TMBX26WH</b>	White	NPF Magnetic	(1) 26W Quad CFL
<b>TMBX26BL</b>	Black	NPF Magnetic	(1) 26W Quad CFL

### DIMENSIONS

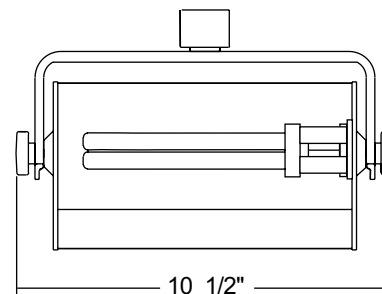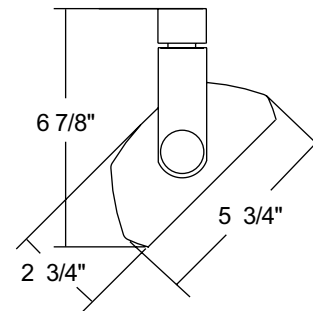

### ENGINEERING DATA

#### 26W, 120V NPF

Total Input Power	31
Operating Amps	.52
Power Factor	.45
T.H.D.	<20%
Min. Starting Temp.	50°F
Crest Factor	<1.7
Ballast Factor	.87

Biax is a registered trademark of General Electric Corporation.

REV-6/09

**PHOTOMETRIC REPORT**

**Test Report #:** ITL44371

**Catalog No:** TMBX26

**Luminaire:** Mini Biax Trac Fixture

**Lamp:** One 26W Quad CFL lamp rated @ 1850 lumens

**TRAC-MASTER®**

Wall Wash/Floods

**MINI-BIAX® SERIES**

**TMBX26**

**FOOTCANDLES ON WALL FROM MULTIPLE UNITS**

Fixture Distance to Wall	2'						3'						4'														
	Ⓐ	2'	Ⓐ	Ⓐ	3'	Ⓐ	Ⓐ	3'	Ⓐ	Ⓐ	4'	Ⓐ	Ⓐ	4'	Ⓐ	Ⓐ	5'	Ⓐ	Ⓐ	6'	Ⓐ						
1'	108	106	108	80	63	80	70	37	70	56	55	56	45	38	45	40	26	40	32	31	32	27	24	27	25	18	25
2'	59	59	59	41	38	41	34	25	34	41	41	41	32	29	32	28	21	28	28	27	28	23	21	23	21	17	21
3'	35	35	35	24	23	24	18	17	18	27	27	27	20	20	20	17	15	17	21	21	21	17	16	17	15	13	15
4'	22	22	22	15	15	15	11	11	11	19	19	19	14	14	14	12	11	12	15	16	15	13	12	13	11	10	11
5'	15	15	15	10	10	10	8	8	8	14	14	14	10	10	10	9	8	9	12	12	12	10	10	10	8	8	8
6'	10	10	10	7	7	7	6	6	6	10	10	10	8	8	8	6	6	6	9	9	9	8	8	8	7	6	7
7'	8	8	8	6	5	6	4	4	4	8	8	8	6	6	6	5	5	5	7	8	7	6	6	6	5	5	5
8'	6	6	6	4	4	4	3	3	3	6	6	6	5	5	5	4	4	4	6	6	6	5	5	5	4	4	4
9'	5	5	5	4	4	4	3	3	3	5	5	5	4	4	4	3	3	3	5	5	5	4	4	4	4	4	4
10'	4	4	4	3	3	3	2	2	2	4	4	4	3	3	3	3	3	3	4	4	4	4	4	4	3	3	3

