



SLOPE CEILING TC REMODEL HOUSING

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

STANDARD SLOPE:

7/12 to 12/12 PITCH (30° to 45°)

INCANDESCENT LAMPS

TC928R

PRODUCT DESCRIPTION

Slope ceiling TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in ceiling from below • Secures in place with factory supplied remodel clips • Designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Adjustable to position lamp perpendicular to floor.



Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made • UL Listed/CSA certified • Trim No. 603 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

DIMENSIONS

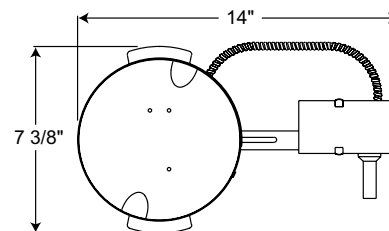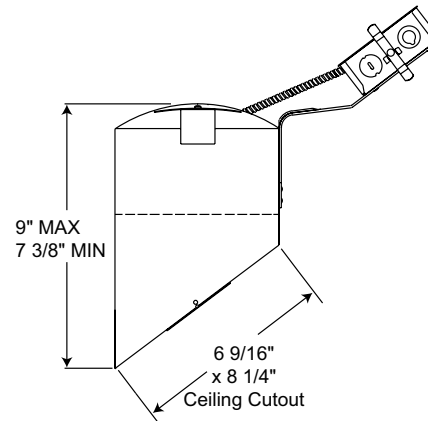

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (4) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing TC housing, 22-gauge white painted steel with aluminum cap • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness • Designed to fit 2x8 or 2x10 construction.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
TC928R	120V	PAR16/PAR38

SLOPE CEILING TC REMODEL HOUSING





STANDARD SLOPE:

7/12 to 12/12 PITCH (30° to 45°)

INCANDESCENT LAMPS

TC928R

TRIMS/LAMPS

	Cat. No.	Description	Lamp Rating
	602C-WH	Multiplier Cone - Clear Alzak®	75W PAR30, 150W PAR38, 85W BR30
	602G-WH	Multiplier Cone - Gold Alzak®	
	602B-WH	Multiplier Cone - Black Alzak®	
	602HZ-WH	Multiplier Cone - Haze	
	602HZ-SC	Multiplier Cone - Haze	
	602W-WH	Multiplier Cone - White	
	602WHZ-WH 602WHZ-ABZ	Multiplier Cone - Wheat Haze Multiplier Cone - Wheat Haze	
	603B-WH ◆	Super Slope Shower Trim with Black Baffle	75W A19, 75W PAR30
	603W-WH ◆	Super Slope Shower Trim with White Baffle	
	604B-WH	Downlight with Black Baffle	150W PAR38
	604B-SC	Downlight with Black Baffle	
	604B-ABZ	Downlight with Black Baffle	
	604B-BL	Downlight with Black Baffle	
	604W-WH	Downlight with White Baffle	
	606B-WH	Black Cylinder Spotlight with Black Baffle	60W PAR16
	606W-WH	White Cylinder Spotlight with White Baffle	

Trim Size: Cat. No. 604 - 9³/₁₆" x 8⁷/₁₆" O.D., Cat. No. 606 - 9¹/₈" O.D.

Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite,

PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White.

◆ UL Listed for use in wet location.