

Ordering Information

Catalog No.	Finish	Mounting	Lamps
22OR3WH	Matte White	All Lytespan Track Systems.	Short neck PAR30 Maximum 75W
22OR3BK	Matte Black	Does not mount on ProSpec Track.	
22OR3AL	Metallic Aluminum		

Features

- Track Attachment Fitting:** Locking lever for mechanical/electrical connection
- Brass Contact:** Extends for connection to second circuit (Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Porcelain socket, medium base, nickel-plated screw shell
- Housing:** Die cast aluminum
- Accessory Cartridge:** Included; rotate clockwise to attach; retaining ring included

Finish

All Painted finishes are baked enamel.

Dimming

Fixture may be used on a track with a dimmer. Consult dimmer manufacturer for correct dimmer selection.

Accessories

- Accessory Holder:** Integral
- Accessories:** Accepts two total (1 lens + 1 louver or 2 lenses)
- Lens:** AF3, ADF3. Not compatible with AF3IR
- Louver:** AL3HC

Labels

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

LIGHTOLIER®




AIMING ANGLE:

- L Beam length
- W Beam Width
- C Distance to center beam
- D Distance
- A Aiming Angle
- FC Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

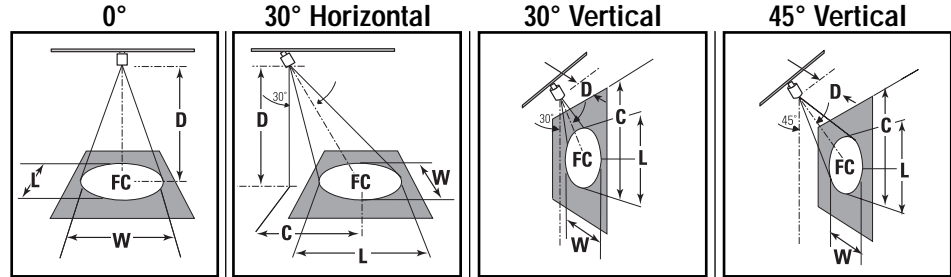

LAMP

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
50W PAR20 SP	10°	4,600	2,500	6'	128	1.0'	1.0'	8'	4.6'	47	1.9'	1.6'	2'	3.5'	144	1.4'	0.7'	4'	4.0'	102	1.4'	1.0'
50W PAR20 NFL	25°	1,500	2,500	4'	116	1.9'	1.9'	3'	1.7'	134	2.0'	1.7'	1'	1.7'	231	2.3'	1.0'	3'	3.0'	73	3.1'	2.0'
50W PAR30 FL	35°	1,400	3,000	6'	39	3.8'	3.8'	6'	3.5'	25	5.2'	4.4'	2'	3.5'	44	7.2'	2.5'	3'	3.0'	55	4.2'	2.7'
60W PAR16 NSP	10°	5,000	2,000	6'	139	1.0'	1.0'	5'	2.9'	130	1.2'	1.0'	3'	3.5'	156	1.4'	0.7'	4'	4.0'	196	1.1'	0.7'
60W PAR16 NFL	30°	1,300	2,000	8'	78	1.4'	1.4'	7'	4.0'	66	1.6'	1.4'	3'	3.5'	69	2.1'	1.0'	5'	5.0'	71	1.6'	1.2'
75W PAR30 NSP	10°	13,000	3,000	10'	50	1.7'	1.7'	7'	4.0'	34	3.7'	3.1'	4'	6.9'	39	2.9'	1.4'	7'	7.0'	36	2.5'	1.7'
75W PAR30 NFL	25°	3,800	3,000	3'	144	1.6'	1.6'	3'	1.7'	94	2.2'	1.9'	1'	1.7'	163	2.7'	1.1'	2'	2.0'	115	2.3'	1.5'
90W PAR38 NSP	9°	19,500	2,500	5'	52	2.7'	2.7'	5'	2.9'	37	3.7'	3.1'	2'	3.5'	41	5.5'	2.1'	3'	3.0'	51	3.5'	2.3'
90W PAR38 SP	12°	14,500	2,500	7'	27	3.8'	3.8'	7'	4.0'	14	5.1'	4.3'	3'	5.2'	18	8.2'	3.2'	4'	4.0'	29	4.6'	3.0'
90W PAR38 NFL	28°	4,500	2,500	9'	16	4.8'	4.8'	9'	5.2'	10	6.6'	5.6'	4'	6.9'	10	10.9'	4.3'	5'	5.0'	18	5.8'	3.8'
90W PAR38 WFL	55°	2,250	2,500	8'	219	1.3'	1.3'	7'	4.0'	186	1.5'	1.3'	3'	5.2'	194	1.9'	0.9'	5'	5.0'	196	1.6'	1.1'
120W PAR38 NSP	10°	25,000	3,000	12'	97	1.9'	1.9'	10'	5.8'	91	2.1'	1.8'	4'	6.9'	109	2.6'	1.3'	7'	7.0'	101	2.2'	1.6'
120W PAR38 FL	30°	4,600	3,000	16'	55	2.5'	2.5'	13'	7.5'	54	2.7'	2.4'	5'	8.7'	70	3.2'	1.6'	9'	9.0'	61	2.9'	2.0'
120W PAR38 WFL	55°	2,000	3,000	20'	35	3.1'	3.1'	16'	9.2'	36	3.4'	2.9'	6'	10.4'	49	3.6'	1.9'	11'	11.0'	41	3.5'	2.4'
250W PAR38 SP	10°	46,500	4,500	6'	106	2.7'	2.7'	5'	3.5'	69	3.6'	3.1'	2'	3.5'	119	4.2'	1.8'	4'	4.0'	84	3.7'	2.5'
250W PAR38 FL	30°	4,600	3,000	8'	59	3.5'	3.5'	8'	4.6'	39	4.8'	4.1'	3'	5.2'	53	6.2'	2.7'	5'	5.0'	54	4.7'	3.1'
250W PAR38 WFL	55°	2,000	3,000	10'	38	4.4'	4.4'	10'	5.8'	25	6.0'	5.1'	4'	6.9'	30	8.3'	3.5'	6'	6.0'	37	5.6'	3.8'
250W PAR38 SP	10°	46,500	4,500	12'	26	5.3'	5.3'	12'	6.9'	17	7.2'	6.1'	7'	7.0'	19	10.4'	4.4'	9'	9.0'	27	6.5'	4.4'
250W PAR38 FL	30°	9,000	4,500	10'	195	1.6'	1.6'	8'	4.6'	198	1.7'	1.5'	4'	6.9'	152	2.6'	1.3'	6'	6.0'	192	1.9'	1.3'
250W PAR38 WFL	55°	2,000	3,000	15'	87	2.4'	2.4'	12'	6.9'	88	2.5'	2.2'	6'	10.4'	60	3.8'	1.9'	9'	9.0'	85	2.9'	2.0'
250W PAR38 FL	30°	9,000	4,500	20'	49	2.4'	2.4'	16'	9.2'	49	3.4'	2.9'	8'	13.9'	38	5.1'	2.5'	12'	12.0'	48	3.8'	2.7'
250W PAR38 WFL	55°	2,000	3,000	25'	31	3.9'	3.9'	20'	11.5'	32	4.2'	3.6'	10'	17.3'	24	6.4'	3.1'	15'	15.0'	31	4.8'	3.3'
250W PAR38 SP	10°	46,500	4,500	8'	227	1.7'	1.7'	7'	4.0'	192	2.0'	1.7'	3'	5.2'	201	2.6'	1.3'	5'	5.0'	205	2.1'	1.5'
250W PAR38 FL	30°	9,000	4,500	12'	101	2.5'	2.5'	10'	5.8'	94	2.8'	2.4'	4'	6.9'	113	3.5'	1.7'	7'	7.0'	105	3.0'	2.1'
250W PAR38 WFL	55°	2,000	3,000	16'	57	3.4'	3.4'	13'	7.5'	56	3.7'	3.2'	5'	8.7'	73	4.3'	2.1'	9'	9.0'	63	3.8'	2.7'
250W PAR38 SP	10°	46,500	4,500	20'	36	4.2'	4.2'	16'	9.2'	37	4.5'	3.9'	6'	10.4'	50	5.2'	2.5'	11'	11.0'	42	4.7'	3.3'
250W PAR38 FL	30°	9,000	4,500	6'	125	3.0'	3.0'	5'	2.9'	117	3.4'	2.9'	2'	3.5'	141	4.9'	2.0'	3'	3.0'	177	3.2'	2.1'
250W PAR38 WFL	55°	2,000	3,000	8'	70	4.0'	4.0'	7'	4.0'	60	4.8'	4.0'	3'	5.2'	63	7.4'	3.0'	5'	5.0'	64	5.3'	3.5'
250W PAR38 SP	10°	46,500	4,500	10'	45	5.0'	5.0'	9'	5.2'	36	6.1'	5.2'	7'	7.0'	35	9.8'	4.0'	9'	9.0'	32	7.4'	4.9'
250W PAR38 FL	30°	9,000	4,500	12'	31	6.0'	6.0'	11'	6.4'	24	7.5'	6.3'	5'	6.7'	23	12.3'	5.0'	9'	9.0'	20	9.6'	6.3'
250W PAR38 WFL	55°	2,000	3,000	6'	63	6.2'	6.2'	6'	3.5'	41	9.2'	7.2'	2'	3.5'	70	44.5'	4.2'	3'	3.0'	199	5.7'	2.9'
250W PAR38 SP	10°	46,500	4,500	7'	46	7.3'	7.3'	7'	4.0'	30	10.7'	8.4'	3'	5.2'	31	66.8'	6.2'	4'	4.0'	88	8.6'	4.4'
250W PAR38 FL	30°	9,000	4,500	8'	35	8.3'	8.3'	8'	4.6'	23	12.2'	9.6'	4'	6.9'	18	89.1'	8.3'	5'	5.0'	50	11.4'	5.9'
250W PAR38 WFL	55°	2,000	3,000	9'	28	9.4'	9.4'	9'	5.2'	18	13.7'	10.8'	5'	8.7'	11	111.3'	10.4'	6'	6.0'	32	14.3'	7.4'
250W PAR38 SP	10°	46,500	4,500	10'	250	1.7'	1.7'	8'	4.6'	254	1.9'	1.6'	4'	6.9'	195	2.9'	1.4'	6'	6.0'	246	2.1'	1.5'
250W PAR38 FL	30°	9,000	4,500	15'	111	2.6'	2.6'	12'	6.9'	113	2.8'	2.4'	6'	10.4'	87	4.3'	2.1'	9'	9.0'	109	3.2'	2.2'
250W PAR38 WFL	55°	2,000	3,000	20'	63	3.5'	3.5'	16'	9.2'	63	3.7'	3.2'	8'	13.9'	49	5.7'	2.8'	12'	12.0'	61	4.2'	3.0'
250W PAR38 SP	10°	46,500	4,500	25'	40	4.4'	4.4'	20'	11.5'	41	4.7'	4.0'	10'	17.3'	31	7.2'	3.5'	15'	15.0'	39	5.3'	3.7'
250W PAR38 FL	30°	9,000	4,500	6'	139	3.2'	3.2'	5'	2.9'	130	3.7'	3.1'	2'	3.5'	156	5.5'	2.1'	3'	3.0'	196	3.5'	2.3'
250W PAR38 WFL	55°	2,000	3,000	8'	78	4.3'	4.3'	7'	4.0'	66	5.1'	4.3'	3'	5.2'	69	6.2'	3.2'	4'	4.0'	71	5.8'	3.8'
250W PAR38 SP	10°	46,500	4,500	10'	50	5.4'	5.4'	9'	5.2'	40	6.6'	5.6'	5'	6.9'	39	10.9'	4.3'	5'	5.0'	36	8.1'	5.3'
250W PAR38 FL	30°	9,000	4,500	12'	35	6.4'	6.4'	11'	6.4'	27	8.1'	6.8'	6'	8.7'	25	13.7'	5.4'	6'	6.0'	22	10.4'	6.8'
250W PAR38 WFL	55°	2,000	3,000	4'	125	3.7'	3.7'	3'	1.7'	144	4.0'	3.2'	1'	1.7'	250	10.7'	1.9'	4'	4.0'	79	7.2'	4.0'
250W PAR38 SP	10°	46,500	4,500	6'	56	5.6'	5.6'	5'	2.9'	52	6.7'	5.4'	3'	3.5'	63	21.5'	3.7'	4'	4.0'	44	9.5'	5.3'
250W PAR38 FL	30°	9,000	4,500	8'	31	7.5'	7.5'	7'	4.0'	27	9.4'	7.5'	3'	5.2'	28	32.2'	5.6'	5'	5.0'	28	11.9'	6.6'
250W PAR38 WFL	55°	2,000	3,000	10'	20	9.3'	9.3'	9'	5.2'	16	12.1'	9.7'	6'	6.9'	16	42.9'	7.5'	6'	6.0'	20	14.3'	7.9'
250W PAR38 SP	10°	46,500	4,500	12'	323	2.1'	2.1'	12'	6.9'	210	2.8'	2.4'	6'	10.4'	161	4.3'	2.1'	10'	10.0'	164	3.5'	2.5'
250W PAR38 FL	30°	9,000	4,500	16'	182	2.8'	2.8'	16'	9.2'	118	3.7'	3.2'	8'	13.9'	91	5.7'	2.8'	12'	12.0'	114	4.2'	3.0'
250W PAR38 WFL	55°	2,000	3,000	20'	116	3.5'	3.5'	20'	11.5'	76	4.7'	4.0'	10'	17.3'	58	7.2'	3.5'	12'	12.0'	114	4.2'	3.0'
250W PAR38 SP	10°	46,500	4,500	24'	81	4.2'	4.2'	24'	13.9'	52	5.6'	4.8'	12'	20.8'	40	8.6'	4.2'	12'	12.0'	114	4.2'	3.0'
250W PAR38 FL	30°	9,000	4,500	8'	141	4.3'	4.3'	8'	4.6'	91	5.9'	5.0'	3'	5.2'	125	8.2'	3.2'	4'	4.0'	199	4.6'	3.0'
250W PAR38 WFL	55°	2,000	3,000	10'	90	5.4'	5.4'	10'	5.8'	58	7.3'	6.2'	4'	6.9'	70	10.9'	4.3'	5'	5.0'	127	5.8'	3.8'
250W PAR38 SP	10°	46,500	4,500	12'	63	6.4'	6.4'	12'	6.9'	41	8.8'	7.4'	5'	8.7'	45	13.7'	5.4'	6'	6.0'	88	6.9'	4.5'
250W PAR38 FL	30°	9,000	4,500	14'	46	7.5'	7.5'	14'	8.1'	30	10.2'	8.7'	6'	10.4'	31	16.4'	6.4'	7'	7.0'	65		