




**2008/2002P1 Series**  
Standard Incandescent

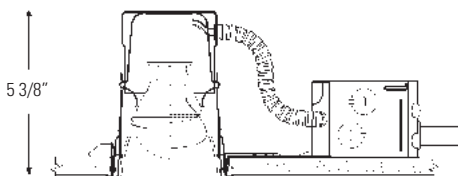


**2008/2003R**  
**LyteLining** NON-IC  
Remodeler Ring

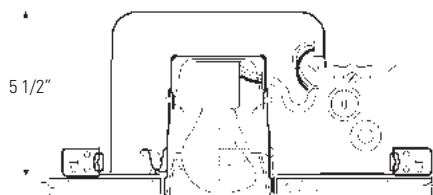


**2008/2000IC**  
Insulated Ceiling  
**2008/2000AIC**  
Insulated Ceiling  
AirSeal®

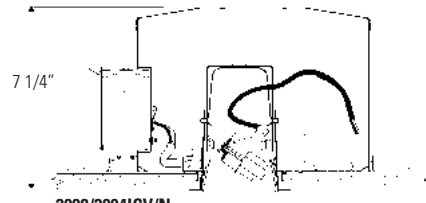


**2008/2004ICV/N**  
**LyteLining** AirSeal® Insulated Ceiling

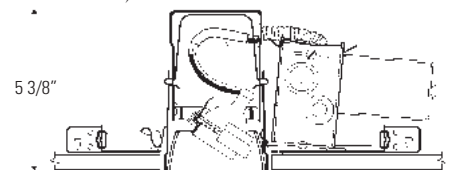

**2008/2000LV**  
Standard Low Voltage

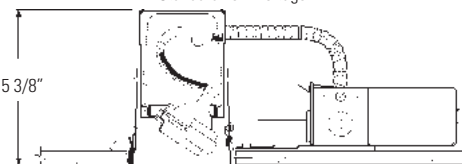

**2008/2000LVR**  
Remodeler Low Voltage

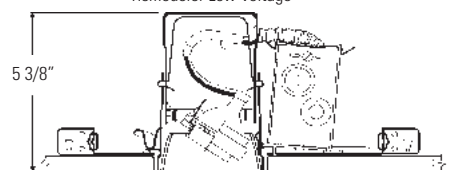

**2008/2000LVNT**  
Remote Transformer

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim		Frame-In Kit — See Individual Frame-In Kit Specification Sheets												
		Line Voltage				Low Voltage								
2008*	2010*	2012*	2013*	2013CD*	2013BK*	2013WH	Frame-In Kit	Install Type	Lamping	Height	Frame-In Kit	Installation Type	Lamping	Height
Brushed Gold	Brushed Clear	Specular Gold	Specular Clear	Clear Diffuse	Specular Blk	Matte White	<b>2002P1</b>	Standard Non-IC	40W A19**	5 1/2"	<b>2000LV</b>	Standard Non-IC		5 3/8"
							<b>2003R</b>	Std. Non-IC Rem.	75W R20, PAR16 50W PAR20	5 3/8"	<b>2000LVR</b>	Remodeler Non-IC		5 3/8"
							<b>2000P1</b>	Standard Non-IC	40W A19** 75W R20, PAR16 50W PAR20	5 1/4"	<b>2000LVE1</b>	Electronic Low Voltage Non-IC 120V	20W-50W MR16	5 3/8"
							<b>2000IC</b>	IC	50W R20, PAR20	5 9/32"	<b>2000LVE2</b>	Electronic Low Voltage Non-IC 277V		5 3/8"
							<b>2000AIC</b>	AirSeal® IC	45W PAR16	5 9/32"	<b>2000LVRE1</b>	Electronic Low Voltage Remodeler 120V LyteLining AirSeal® IC		5 3/8"
											<b>2004ICV/N</b>			7 1/4"
											<b>2000LVNT</b>	Low Voltage Remote Transformer	20W-42W MR16	5 3/8"
											<b>2000AICV</b>	LyteLining AirSeal® IC	20W-35W MR16	5 9/32"

\*Add "NM" to SKU for Natural Metal Flange \*\* 60W A19 with 2003R

### Features

- Reflector:** Hydroformed aluminum, .040" thick (18 ga.); white or Natural Metal trim flange.
- Cone:** Aluminum cone painted anodized finish.
- Frame-In Kit:** (2002P1 standard frame shown) Other frame shown on the right. See Frame-In Kit specification sheet for more detail.

### Options & Accessories

**Lytegems:** See 1300 Series Specification Sheets.  
**Retaining Clips:** 1955 - For Installing in Existing Ceiling

### Labels

UL (Suitable for Damp Locations), I.B.E.W

### Job Information

### Type:


**Job Name:**

**Cat. No.:**


**Lamp(s):**

**Notes:**

### LINE VOLTAGE LAMPS

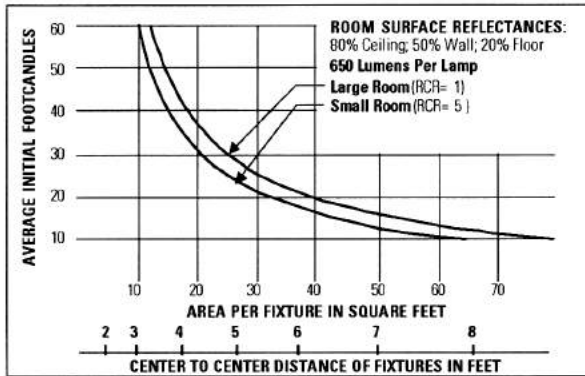


Use quick calculator chart to determine the spacing of 50W PAR20 NFL units (Clear and Gold) for a desired level of illumination. Conversion Factors: 50W PAR20 NFL, White, F.C. x 0.9; Black, F.C. x 0.85; 75W PAR16 NFL, Clear and Gold, F.C. x 1.5; White, F.C. x 1.4; Black, F.C. x 1.2

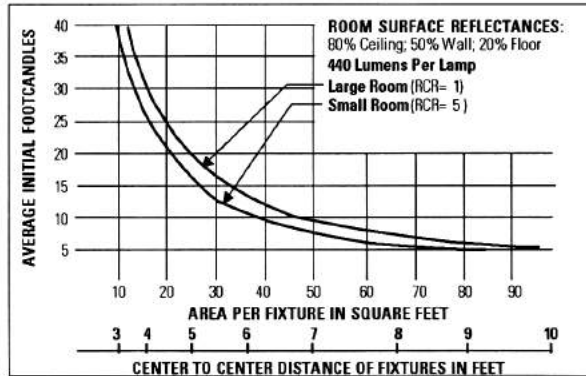


Use quick calculator chart to determine the spacing of 50W R20 units (Clear, Gold & White) for a desired level of illumination. Conversion Factors: 75W R20, Clear, Gold and White, F.C. x 1.8; 50W R20, Black, F.C. x 0.85; 75W R20, Black, F.C. x 1.15; 40W A19 (S.R.=1.3), Clear and Gold, F.C. x 0.55; White, F.C. x 0.35; Black, F.C. x 0.2

### SPACING RATIO: 0.6

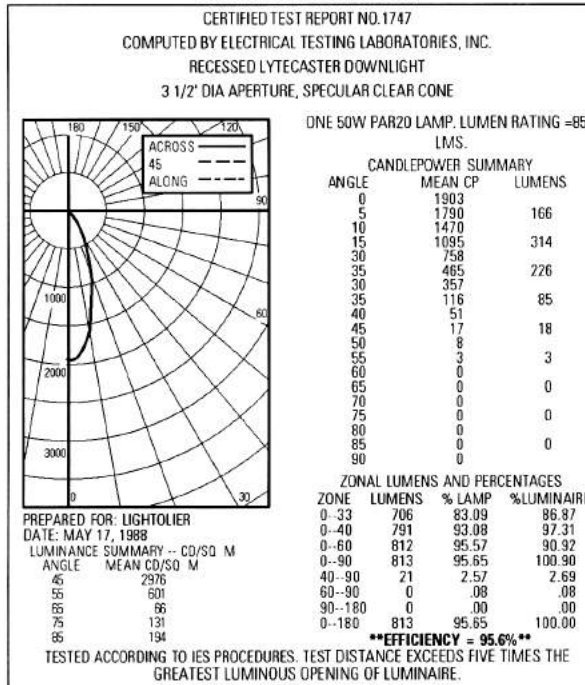

### SPACING RATIO: 0.8

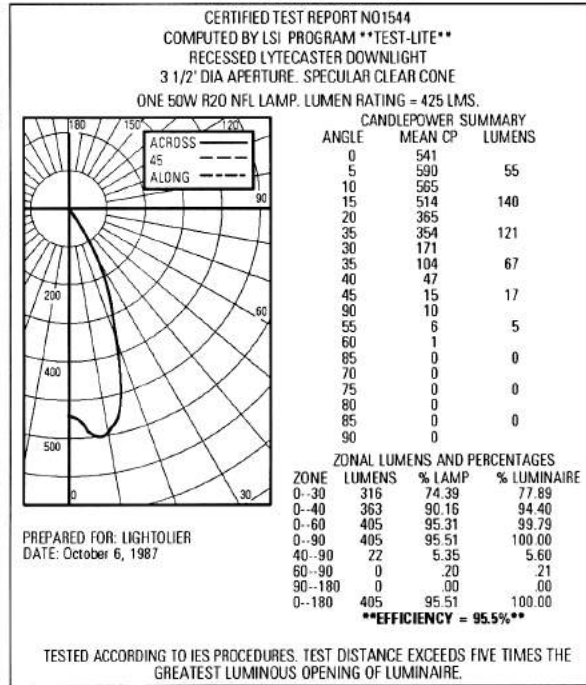

### COEFFICIENTS OF UTILIZATION

ROOM CAVITY RATIO	% EFFECTIVE CEILING CAVITY REFLECTANCE															
	80				70				50				30			
	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0
1	1.08	1.07	1.06	1.03	1.03	1.01	1.00	.99	.98	.97	.96	.95	.95	.93		
2	1.04	1.01	.99	1.02	.99	.97	.95	.99	.97	.95	.96	.95	.93	.94	.93	.92
3	.99	.96	.94	.98	.95	.93	.96	.94	.92	.94	.92	.90	.92	.90	.89	.88
4	.96	.92	.90	.95	.92	.89	.93	.90	.88	.91	.89	.87	.89	.88	.86	.85
5	.92	.88	.85	.91	.88	.85	.90	.87	.84	.88	.86	.84	.87	.85	.83	.82
6	.89	.85	.83	.88	.85	.82	.87	.84	.82	.86	.83	.81	.85	.82	.81	.80
7	.86	.82	.79	.85	.82	.79	.84	.81	.79	.83	.80	.79	.82	.80	.79	.77
8	.83	.79	.76	.82	.79	.76	.81	.78	.76	.81	.78	.75	.80	.77	.75	.74
9	.80	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.73	.77	.75	.73	.72
10	.77	.74	.71	.77	.74	.71	.76	.73	.71	.76	.73	.71	.75	.72	.70	.69

20% FLOOR CAVITY REFLECTANCE  
Conversion Factors: 50W PAR20 NFL: White, C.U. x 0.9; Black, C.U. x 0.85; 75W PAR16 NFL Clear and Gold, C.U. x 1.0; White, C.U. x 0.95; Black, C.U. x 0.85.

### COEFFICIENTS OF UTILIZATION

ROOM CAVITY RATIO	% EFFECTIVE CEILING CAVITY REFLECTANCE															
	80				70				50				30			
	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0
1	1.08	1.06	1.04	1.06	1.04	1.03	1.02	1.01	1.00	.98	.98	.97	.95	.95	.94	.92
2	1.02	1.00	.97	1.01	.96	.96	.98	.96	.94	.96	.93	.92	.93	.91	.90	.89
3	.97	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.90	.88	.86	.85
4	.93	.89	.85	.92	.89	.85	.90	.87	.85	.88	.86	.84	.87	.85	.83	.82
5	.89	.84	.81	.88	.84	.81	.85	.83	.80	.85	.82	.80	.83	.81	.79	.78
6	.85	.81	.78	.84	.80	.77	.83	.80	.77	.82	.79	.76	.81	.78	.75	.75
7	.81	.77	.74	.81	.76	.73	.79	.76	.73	.78	.75	.72	.77	.74	.72	.71
8	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.69	.74	.71	.69	.68
9	.74	.70	.67	.74	.70	.67	.73	.69	.65	.72	.68	.65	.71	.68	.65	.65
10	.71	.67	.63	.71	.67	.63	.70	.65	.63	.69	.65	.63	.69	.65	.63	.62

20% FLOOR CAVITY REFLECTANCE  
Conversion Factors: 50/75W R20: Clear, Gold and White, C.U. x 1.0; Black, C.U. x 0.65; 40W A19 (S.R.=1.3): Clear and Gold, C.U. x 0.55; White, C.U. x 0.35; Black C.U. x 0.2.

**Job Information**      **Type:**