

# MONORAIL

## MonoRail Surface Transformer-300W 24V Mag

### DESCRIPTION

This single-feed surface transformer converts standard 120 line-voltage to 24 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 300 watts. The transformer is concealed inside a decorative housing with a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the breaker can be reset.

### INSTALLATION


This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included). Rail is installed through the power feeds on the canopy to bring power to the run.

### OTHER

Black and white finish have satin nickel feeds. The shortest rigid standoff that can be used with this surface transformer is the 4" rigid standoff (sold separately). If dropping the rail more than 4" below the ceiling, order the desired rigid standoff length and one compatible power extender (sold separately). This surface transformer may be plugged in with the addition of a Plug Option, a 16' cord with plug (sold separately). 24 volt transformers require the use of 24 volt lamps. Not compatible with LED lamping.

### WEIGHT

12.15lb / 5.51kg ±

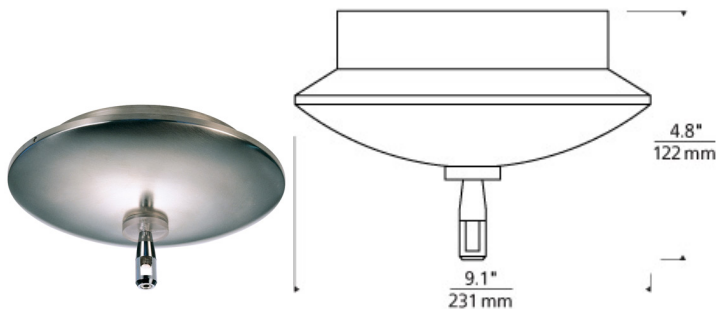

monorail surface  
transformer-300w  
24v mag

### ORDERING INFORMATION

700MOSRT324D FINISH

- Z ANTIQUE BRONZE
- B BLACK
- C CHROME
- S SATIN NICKEL
- W WHITE

Note: Not compatible with LED lamping.



**TECH LIGHTING®**  
7400 Linder Avenue      T 847.410.4400  
Skokie, Illinois 60077      F 847.410.4500

**Tech Lighting, L.L.C.**

700MOSRT324D _____
FIXTURE TYPE: _____
JOB NAME: _____
NOTES: _____
_____
_____