

LOW-VOLTAGE PENDANTS

Essex Pendant



DESCRIPTION

Individually slumped glass panels joined with a metal frame. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAA® module and six feet of field-cutttable suspension cable.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. ForFor Kable Lite due to weight.

ACCESSORIES & OPTICAL CONTROLS

Line-voltage Swag Hook, Swag Hook

WEIGHT

2.1lb / 0.95kg ±

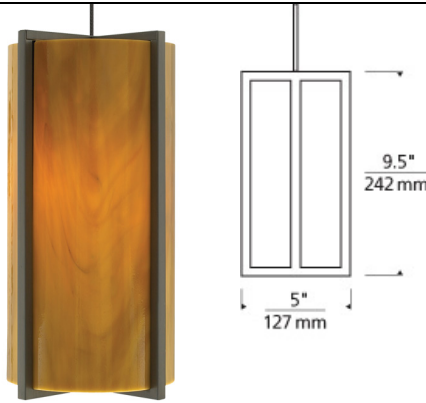

beach amber



beach amber



sand



surf white

ORDERING INFORMATION

700 SYSTEM	ESX	COLOR	FINISH	LAMP		
FJ	FREEJACK	A	BEACH AMBER	Z	ANTIQU BRONZE	12 VOLT HALOGEN
MP	MONOPOINT	S	SAND	S	SATIN NICKEL	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL	W	SURF WHITE	-24		24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL					

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.



TECH LIGHTING®

7400 Linder Avenue
Skokie, Illinois 60077

T 847.410.4400
F 847.410.4500

Tech Lighting, L.L.C.

700 ____ ESX ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2015 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.