

LOW-VOLTAGE PENDANTS

Veil Pendant

DESCRIPTION

Cylindrical shade with crushed glass texture accented with inner layer of gold or silver. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAA® module and six feet of field-cutttable suspension cable. Works with SORAA.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module

WEIGHT

2.38lb / 1.08kg ±

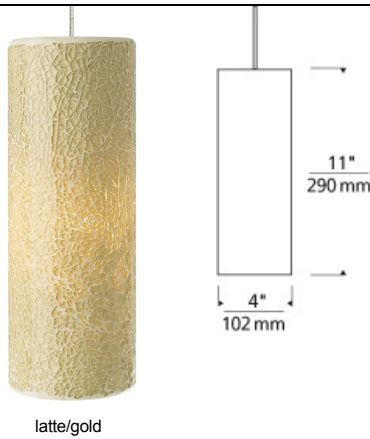

latte/gold



brown/gold



latte/gold



white/silver

ORDERING INFORMATION

700	SYSTEM	VEI	COLOR	FINISH	LAMP
FJ	FREEJACK		N BROWN/GOLD	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT		L LATTE/GOLD	C CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL		W WHITE/SILVER	S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ VEI ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2016 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.