



Assemble the Fixture



installing the metal outer shade.

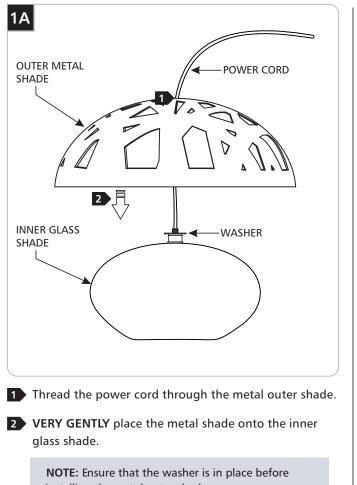

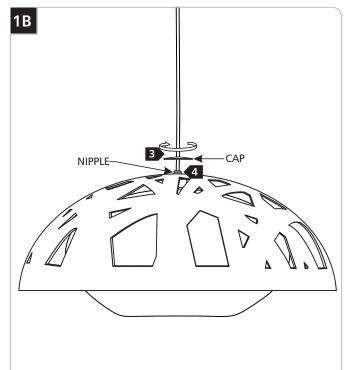


3 Thread the power cord through the cap.

4 Ensuring that the outer metal shade is centered and screw the cap tightly onto the nipple to secure the assembly.

NOTE: Do not over tighten the cap. Over-tightening may break the glass and result in injury.

Installing the Lamp

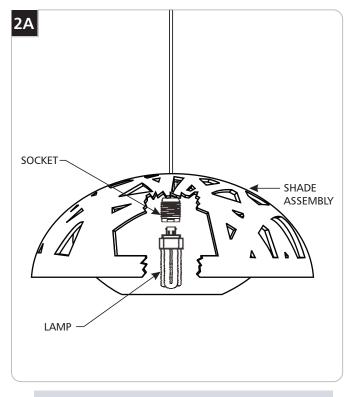

CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

Use **MAX 32 Watt** GX24Q-3 Base Triple Tube Compact Fluorescent Lamp.



Hold the fixture assembly with one hand and push the lamp base firmly all the way into the socket.

SAVE THESE INSTRUCTIONS!



www.techlighting.com

© 2012 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company