

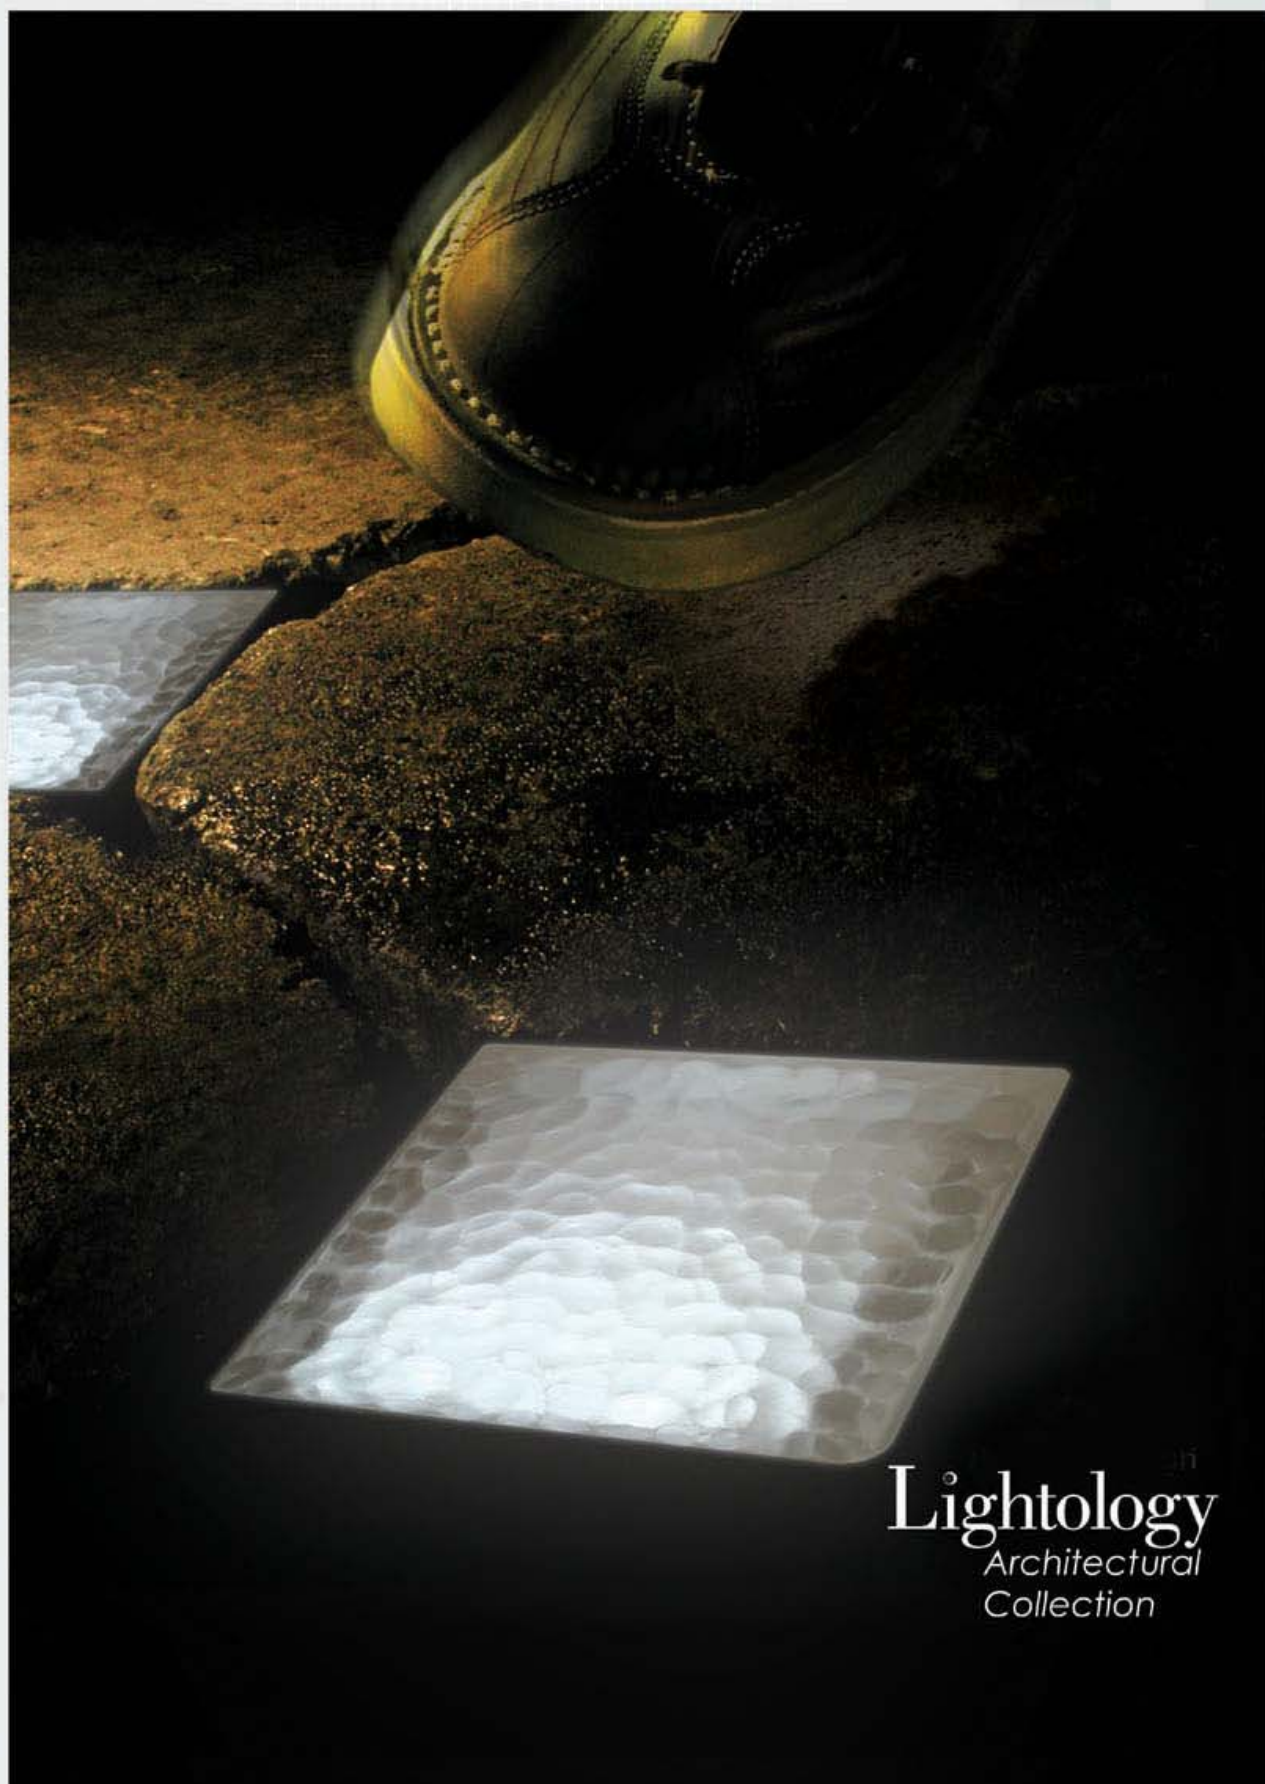



LOFOTEN

collection

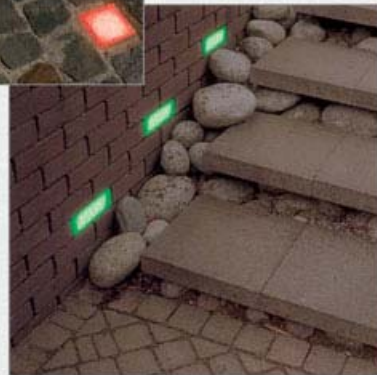

Lightology
Architectural
Collection

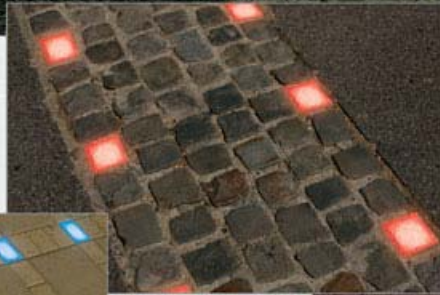

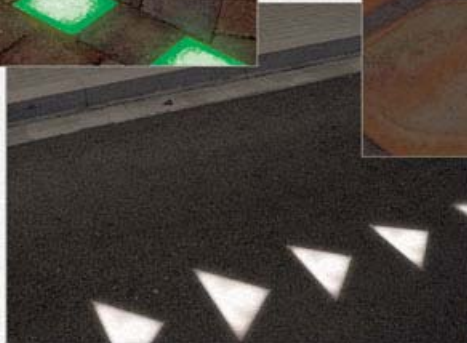

The Lofoten Collection range of LED fixtures have been especially designed for direct integration into walls and floors, or for mounting on sturdy supports, with minimum power requirements and extraordinary maintenance-free long life.

All fixtures are waterproof IP68 and operate at 12V AC/DC current, solidly built of cast hardened glass and AISI 316 stainless steel with fully encapsulated electronics.



LOF101



LOF102



LOF103



LOF104



LOF105

Ramberg


For direct surface integration

Recessed cube-shaped paver with high luminous intensity. Tempered glass body with frosted slip-proof finish. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output.

Can be incorporated directly into the wall or floor for perfect aesthetical integration indoors or outdoors. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1W.

Available with white, blue, red, green or amber light. Two light-tone combinations can be produced to special order.


Dimensions: 3.9" x 3.9" x 2.8"

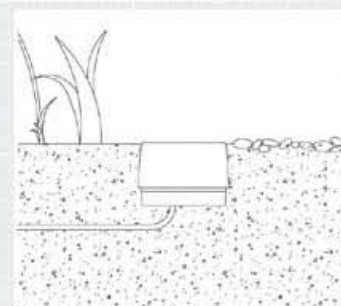

Full technical information available upon request.



For direct surface integration

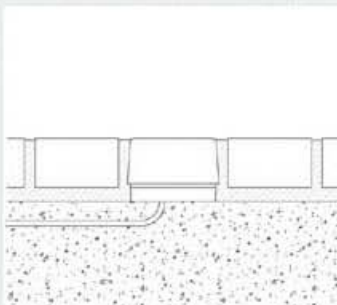

Dimensions: 4.1" x 2.8"

Recessed cylinder-shaped paver with high luminous intensity. Tempered glass body with frosted slip-proof finish. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output.




Can be incorporated directly into the wall or floor for perfect aesthetical integration indoors or outdoors. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1W.

Available with white, blue, red, green or amber light.

Two light-tone combinations can be produced to special order.



Ramberg

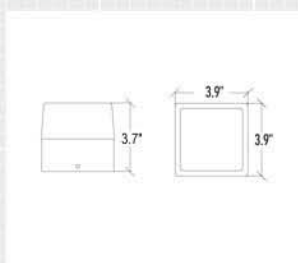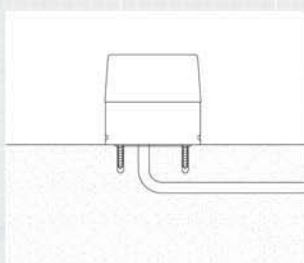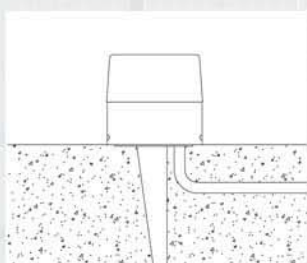

Surface-mounted

Surface-mounted cube-shaped fixture with high luminous intensity. Tempered glass body with AISI 316 stainless steel base. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1W. Available with white, blue, red, green or amber light.

LOF15X Brushed Stainless Steel
LOF16X Black Epoxy

Accessories:
Fixing Spike

Dimensions:
3.5" x 14.8"






Available
Colours:

Dimensions:
3.9" x 3.9" x 3.7"



Flakstad

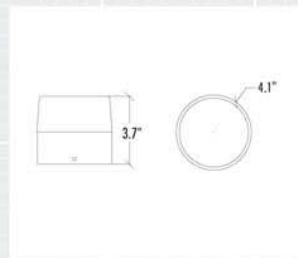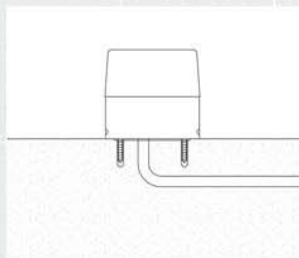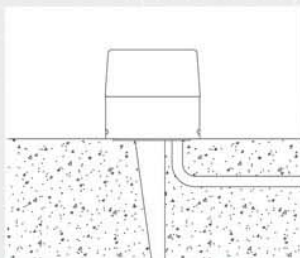

Surface-mounted

Surface-mounted cylinder-shaped fixture with high luminous intensity. Tempered glass body with AISI 316 stainless steel base. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1W. Available with white, blue, red, green or amber light.

LOF25X Brushed Stainless Steel
LOF26X Black Epoxy

Accessories:
Fixing Spike

Dimensions:
3.5" x 14.8"



LOF701

Available
Colours:

Dimensions:
4.1" x 3.7"



LOF251/261



LOF252/262



LOF253/263






LOF254/264



LOF255/265

Ramberg

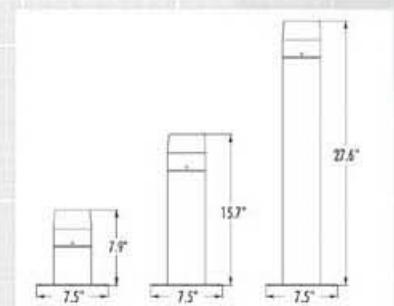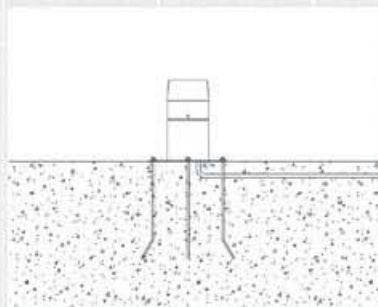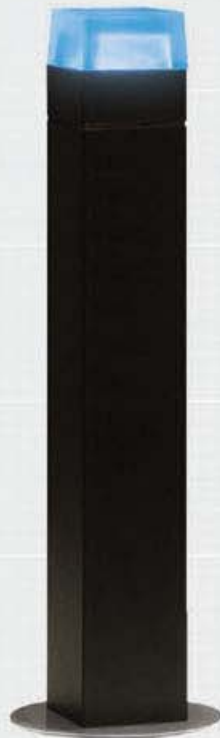

Bollards

Bollard mounted cube-shaped fixture with high luminous intensity. Tempered glass body with AISI 316 stainless steel base. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1W. Available with white, blue, red, green or amber light.

Accessories:
Concrete anchors

Dimensions:
9.8"



Available
Colours:

Dimensions:
3.9" x 3.9" x 3.7"





LOF15X Brushed Stainless Steel
LOF16X Black Epoxy

Full technical information available upon request.



Flakstad

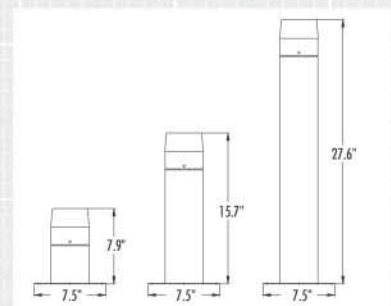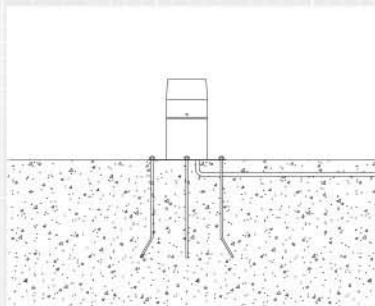

Bollards

Bollard mounted cylinder-shaped fixture with high luminous intensity. Tempered glass body with AISI 316 stainless steel base. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1W. Available with white, blue, red, green or amber light.

Accessories:
Concrete anchors

Dimensions:
9.8"



Available
Colours:

Dimensions:
3.9" x 3.9" x 2.8"



LOF25X Brushed Stainless Steel
LOF26X Black Epoxy

Vikten



LOF301



LOF302



LOF303



LOF304



LOF305

Dimensions: 9.4" x 2.0" x 2.4"



For direct surface integration

Recessed brick-shaped paver with high luminous intensity. Tempered glass body with frosted slip-proof finish.

Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output.

Can be incorporated directly into the wall or floor for perfect aesthetical integration indoors or outdoors. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 1,5W.

Available with white, blue, red, green or amber light. Two light-tone combinations can be produced to special order.

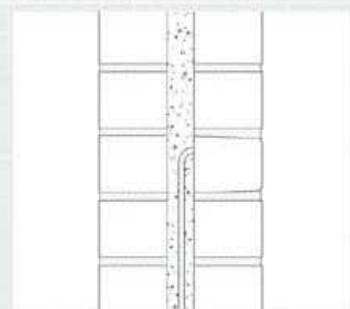

Full technical information available upon request.



LOF401



LOF402



LOF403




LOF404



LOF405

Dimensions: 7.9" x 7.9" x 2.8"

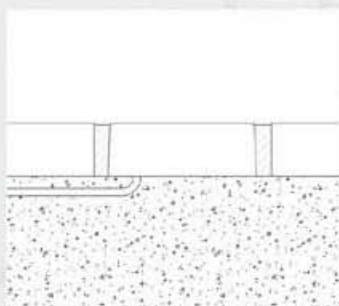

Moskenes

For direct surface integration

Recessed triangle-shaped paver with high luminous intensity. Tempered glass body with frosted slip-proof finish. Powered with LED's (50,000 to 100,000h average lamp life) with stabilizing electronics for even luminous output.

Can be incorporated directly into the wall or floor for perfect aesthetical integration indoors or outdoors. IP 68 protection. Operating at 12V AC/DC using standard lighting transformers, and a power consumption of approx. 2W.

Available with white, blue, red, green or amber light. Two light-tone combinations can be produced to special order.



Full technical information available upon request.



Lightology

SHOWROOM
215 W. Chicago
Chicago, IL 60610
Tel 312.944.1000
Fax 312.943.9587

CORPORATE
1718 W. Fullerton
Chicago, IL 60614
Tel 773.883.6111
Fax 773.883.6131

www.lightology.com