

RELED300LU2 3.5 Inch 18W Non-IC Remodel Housing



Description:

3.5 inch LED 18 watt non-ic remodel housing with electronic driver has .051 inch thick galvanized steel, is below ceiling accessible, takes up to .9 inch thick ceiling, and has no light leak. Housing should be at least 3 inches from insulation. 3.6 inch ceiling cut out. Max 18 watts with 2700K and 3000K or 15 watts with 4000K LED. For use with compatible trims LEDR314, LEDR315, LEDR345, LEDR347, LEDS314, LEDS315, LEDS345. 13.75 inches long x 4.6 inches wide x 5.6 inches high. Suitable for damp location. UL listed.





Shown in: Galvanized Steel

List Price: \$150.00
 Our Price: \$37.50

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x LED/18W/120V LED
 Wattage: 18W
 Dimmer: Dimmable
 Dimensions: 13.75"L x 5.6"H x 4.6"W

Technical Information

Lamp Color: 3000 K
 Function: Downlight
 Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Aperture Shape: Round
 Aperture Size: 3.000"

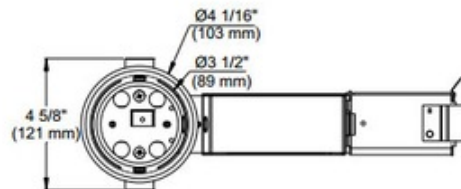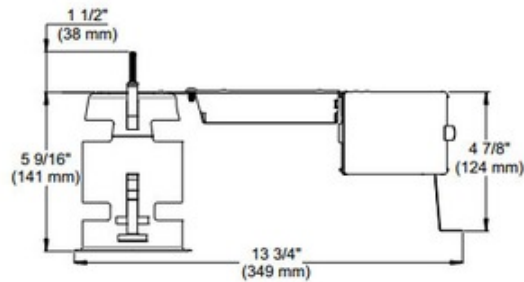

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com

Product Number: CLT106635			
Company:		Fixture Type:	Date: Mar 17, 2018
Project:		Approved By:	