

NW2000E 4 Inch 50W ELV Non-IC Shallow New Construction



Description:

NW2000E 4 inch Low Voltage Non-IC Shallow New Construction Housing is equipped with thermal protection and is suitable for damp locations. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage electronic 12 volt transformer included. One 50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage electronic dimmer. See attached dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 4.25 inch ceiling cut out. 14.38 inch length x 10 inch width x 4.5 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Galvanized Steel

List Price: \$120.25
 Our Price: \$73.59

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/50W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 50W
 Dimmer: Dimmable
 Dimensions: 14.38"L x 4.5"H x 10"W

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: New Construction NON IC
 Housing Height: 5"
 Aperture Size: 4.000"

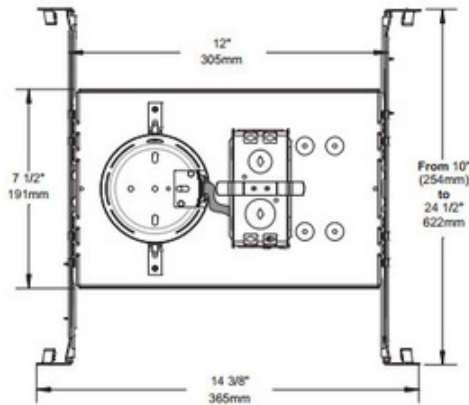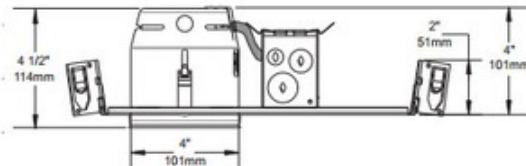

Product Number: CLT106642			
Company:		Fixture Type:	Date: Apr 21, 2018
Project:		Approved By:	

#0314NH-NW2000E-012H1-XXGS

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com