




BRAND Contrast Lighting

DESCRIPTION

NW2000CE 4 Inch Non-IC Shallow New Construction Housing is a thermally protected housing suitable for non-insulated new construction installations. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. Dimmable with a low voltage electronic dimmer. See attached dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 4.25 inch ceiling cut out. 12 inch length x 7.5 inch width x 3.5 inch height. A complete fixture includes a housing and trim, sold separately.


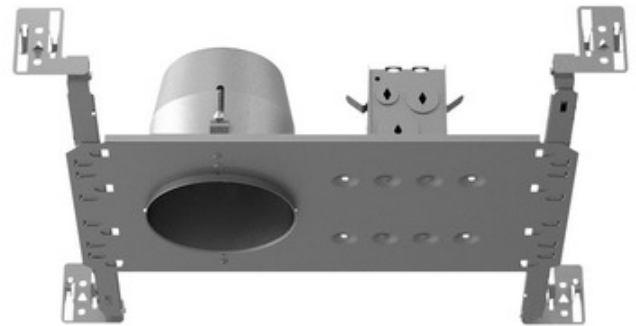


TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.38"L x 7.5"W x 4.5"H
BULB NOT INCLUDED	
LAMP	MR16/GU5.3 (bipin)/50W/12V Halogen MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	5"
APERTURE SIZE	4.000"

SPEC # CLT106642

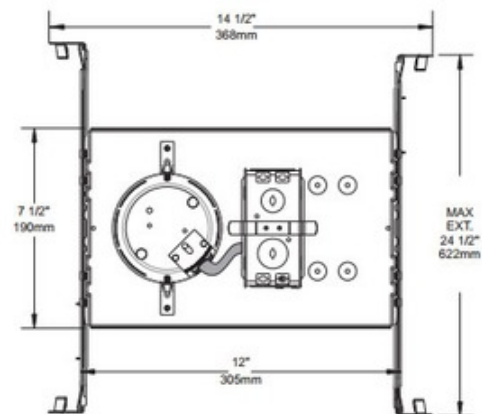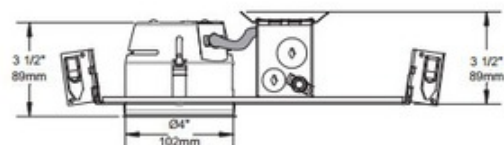

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE