



**BRAND** Contrast Lighting

**DESCRIPTION**

NW4000E 3 inch low voltage Non-IC new construction housing. Cannot be used in contact with insulation and should be at least 3 inches away from insulation. Below ceiling accessible. 12 volt electronic transformer included. Takes up to 7/8 inch ceiling. One 35 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3 5/16 inch ceiling cut out. 11.4 inch length x 7.3 inch width x 4.6 inch height. A complete fixture includes a housing and trim, sold separately.




<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	35W
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	11.4"L x 7.3"W x 4.6"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	1 x MR16/GU5.3 (bipin)/35W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	New Construction NON IC
<b>HOUSING HEIGHT</b>	5"
<b>APERTURE SIZE</b>	3.000"

**SPEC #** CLT106646

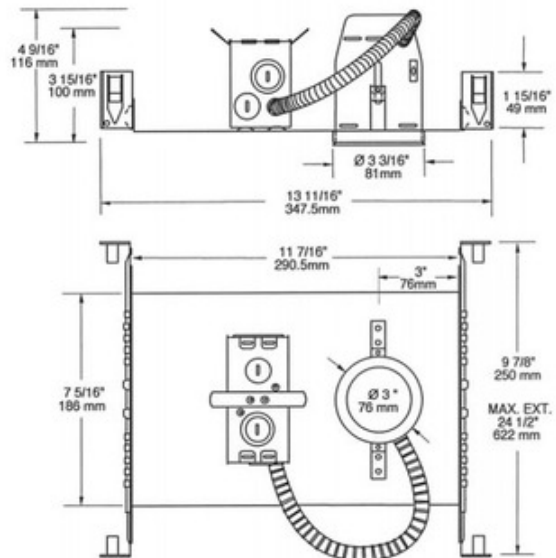

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE