



BRAND

Contrast Lighting

DESCRIPTION

NW4000E 3 inch low voltage Non-IC new construction housing. Cannot be used in contact with insulation and should be at least 3 inches away from insulation. Below ceiling accessible. 12 volt electronic transformer included. Takes up to 7/8 inch ceiling. One 35 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3 5/16 inch ceiling cut out. 11.4 inch length x 7.3 inch width x 4.6 inch height. A complete fixture includes a housing and trim, sold separately.




TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	35W
DIMMER	Low Voltage Electronic
DIMENSIONS	11.4"L x 7.3"W x 4.6"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/35W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	5"
APERTURE SIZE	3.000"

SPEC # CLT106646

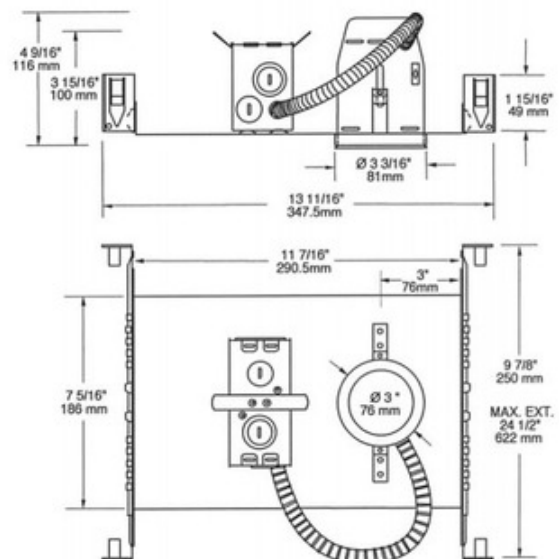

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE