

IT2000CM 4 Inch 42W MLV Shallow Remodel Housing



Description:

IT2000CM 4 inch low voltage Non-IC shallow remodel housing is equipped with thermal protection and is suitable for damp locations. Cannot be used in contact with insulation and should be at least 3 inches from insulation. Magnetic 120 volt to 12 volt transformer included. Takes up to 7/8 inch thick ceiling. Below ceiling accessible. One 42 watt maximum, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. 4.25 inch ceiling cut out. 13.25 inch length x 5.4 inch width x 3.7 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Galvanized Steel

List Price: \$83.50
 Our Price: \$60.12

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/42W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 42W
 Dimmer: Low Voltage Magnetic
 Dimensions: 13.25"L x 3.7"H x 5.4"W

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Housing Height: 4"
 Aperture Size: 4.000"

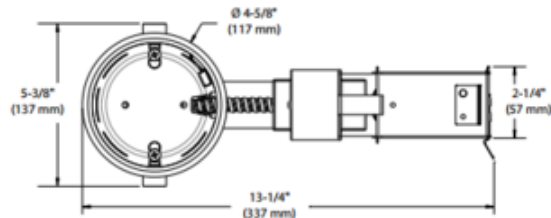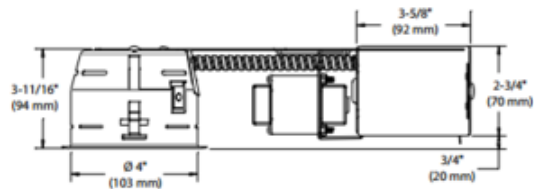

Product Number: CLT106648			
Company:		Fixture Type:	Date: Mar 23, 2018
Project:		Approved By:	

#0314RH-IT2000C-013H1-XXGS

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com