



BRAND

Contrast Lighting

DESCRIPTION

IT2000CM 4 inch low voltage Non-IC shallow remodel housing is equipped with thermal protection and is suitable for damp locations. Cannot be used in contact with insulation and should be at least 3 inches from insulation. Magnetic 120 volt to 12 volt transformer included. Takes up to 7/8 inch thick ceiling. Below ceiling accessible. One 42 watt maximum, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. 4.25 inch ceiling cut out. 13.25 inch length x 5.4 inch width x 3.7 inch height. A complete fixture includes a housing and trim, sold separately.





| | |
|--------------------------|------------------------------------------------------------------|
| TRIM COLOR | N/A |
| BODY FINISH | Galvanized Steel |
| WATTAGE | 42W |
| DIMMER | Low Voltage Magnetic |
| DIMENSIONS | 13.25"L x 5.4"W x 3.7"H |
| BULB NOT INCLUDED | |
| LAMP | MR16/GU5.3 (bipin)/42W/12V Halogen MR16/GU5.3 (bipin)/12V LED |

Technical Information

| | |
|-----------------------|-------------------|
| CEILING TYPE | Drywall with Trim |
| HOUSING TYPE | Remodel NON IC |
| HOUSING HEIGHT | 4" |
| APERTURE SIZE | 4.000" |

SPEC # CLT106648

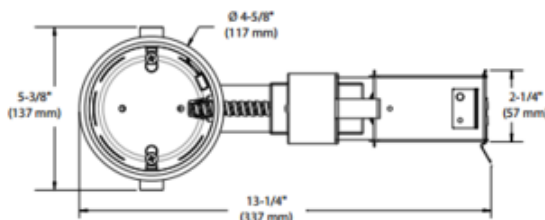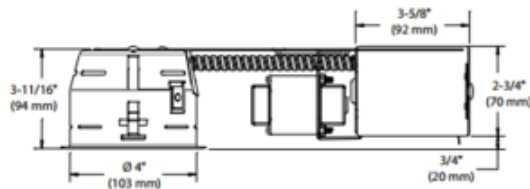

| | | | | |
|---------|---------|--------------|-------------|------|
| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
| | | | | |