



BRAND

Contrast Lighting

DESCRIPTION

IT4000CE 3 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 20 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Halogen dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3.25 inch ceiling cut out. 11.1 inch length x 4.25 inch width x 3.25 inch height. A complete fixture includes a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	20W
DIMMER	Low Voltage Electronic
DIMENSIONS	11.1"L x 4.25"W x 3.25"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/20W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	4"
APERTURE SIZE	3.000"

SPEC #	CLT106651
--------	-----------

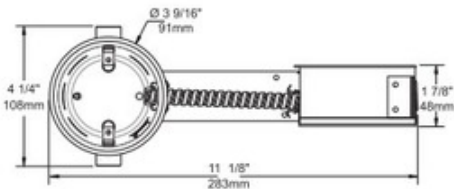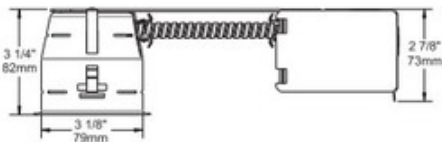

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE