

# IT4000CE 3 Inch 20W ELV Non-IC Shallow Remodel Housing



**Description:**



IT4000CE 3 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 20 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Halogen dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3.25 inch ceiling cut out. 11.1 inch length x 4.25 inch width x 3.25 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Galvanized Steel

List Price: \$104.00  
 Our Price: \$74.88

Shade Color: N/A  
 Body Finish: Galvanized Steel  
 Lamp: 1 x MR16/GU5.3 (bipin)/20W/12V Halogen  
 1 x MR16/GU5.3 (bipin)/12V LED  
 Wattage: 20W  
 Dimmer: Low Voltage Electronic  
 Dimensions: 11.1"L x 3.25"H x 4.25"W

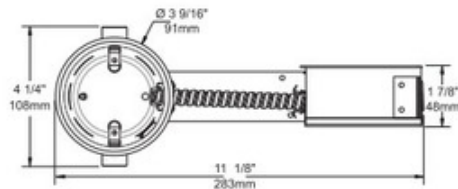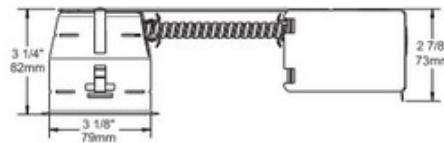

**Technical Information**

Ceiling Type: Drywall with Trim  
 Housing Type: Remodel NON IC  
 Housing Height: 4"  
 Aperture Size: 3.000"

Product Number: <b>CLT106651</b>			
Company:		Fixture Type:	Date: Mar 23, 2018
Project:		Approved By:	