



BRAND

Contrast Lighting

DESCRIPTION

IT7000M 4.25 Inch Low Voltage Non-IC Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer included. One 37-50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Halogen dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 4.3 inch ceiling cut out. 13.3 inch length x 5 inch width x 4.5 inch height. A complete fixture includes a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Low Voltage Magnetic
DIMENSIONS	13.3"L x 5"W x 4.5"H
BULB NOT INCLUDED	
LAMP	MR16/GU5.3 (bipin)/50W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	5"
APERTURE SIZE	4.000"

SPEC # CLTI06655

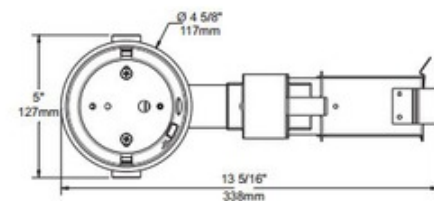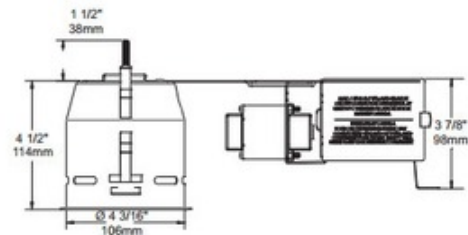

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE