

# IL116G Inground Uplight with Rock Guard 7W 36 Deg



**Description:**


IL116G 7 Watt 36 Degree Flood LED Inground Uplight with Rock Guard is fabricated from a single piece of compression molded fiberglass reinforced polyester composite pressure tested to ensure water will not wick or leak through. Bronze finish trim ring and rock guard is a textured composite material. Natural Brass trim ring and rock guard is a metal finish. Clear convex, tempered soda-lime glass for high impact resistance. 2200 pound live-load rated, standard walk-over lens. 7 watt Warm White 2700K color temperature GU5.3 MR16 LED lamp with 36 degree beam spread is included. Available in a 24 degree narrow flood and 36 degree flood beam angle option. 25,000 hour average lamp life. Lamps have 15 degree articulation either side of vertical and 358 degree rotation without interruption of beam pattern. Pre-wired with 3 foot pigtail of 18-2 AWG wire. Includes low voltage quick connector LVC3 for easy hook up to the low voltage supply cable not included. 6.6 inch diameter x 8.4 inch height. ETL listed for wet locations. Required transformer and optional mounting and optical accessories sold separately.

Shown in: Bronze / Clear

List Price: \$255.45  
 Our Price: \$153.27

Shade Color: Clear  
 Body Finish: Bronze  
 Lamp: 1 x MR16/GU5.3 (bipin)/7W/12V LED  
 Wattage: 7W  
 Dimmer: Dimmable  
 Dimensions: 8.4"H x 6.6"W

Technical Information  
 Lamp Color: 2700 K

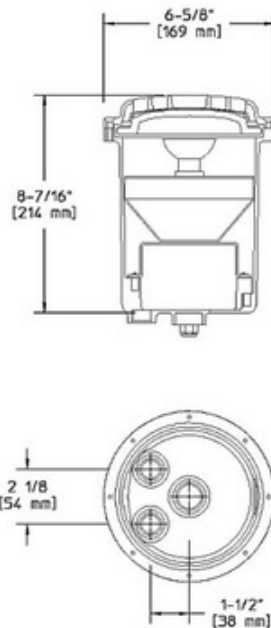

Product Number: <b>HAD 1 19530</b>			
Company:		Fixture Type:	Date: Mar 23, 2018
Project:		Approved By:	

#0810LD-IL1GFLW-007L1-CLBZ

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com