



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Angle Display Sign Light with 2.8 Inch Square Canopy features a lambertian white diffuser that provides uniform light without hotspots. At 7.5 watts per foot, the 24 volt DC channel is available in a variety of color temperature and finish options in 12 inch increments up to 120 inches. Arm extends 14 inches from wall. Hinges on the fixture arm rotates up to 90 degrees. Can be powered using a 60 watt electronic low voltage (ELV) power supply (PS-60L-ELV) that fits inside junction box, or a Universal (UNI) power supply that requires a remote installation, sold separately. Universal power supply dimmable with electronic low voltage (ELV), Triac or 0-10V dimmer, sold separately. Required power supply and dimmer control sold separately. Note: For indoor use only. Product is built to order. Note: Limited quantities available in White and Satin Aluminum finishes.





SHADE COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	7.5W
DIMMER	Dimmable
DIMENSIONS	12"L x 1.37"W x 1.4"H x 14"D
INTEGRATED LED MODULE	
LAMP	1 x LED/7.5W/24V LED

Technical Information

LUMINOUS FLUX	270 lumens
LUMENS/WATT	36.00
LAMP COLOR	2700K
COLOR RENDERING	95 CRI

SPEC # EDG146352

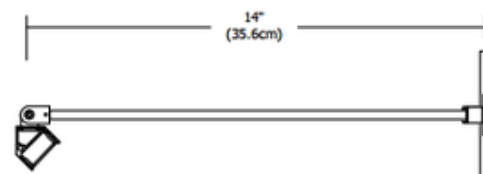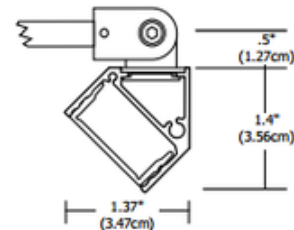

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE
