



**BRAND**

Beach Lighting

**DESCRIPTION**

R3-G19AT 3 Inch Series Non-IC Airtight New Construction Housing is designed for use in 120 volt line voltage applications. Non-IC rated housing must be kept 3 inch minimum away from insulation. Features steel construction with a low 4.5 inch profile for shallow ceilings. Adjusts up to 1.75 inch ceiling thickness. Accommodates up to a 50 watt, 120 volt GU10 MR16 halogen or 10 watt, 120 volt GU10 MR16 LED bulb, sold separately. Halogen dimmable with a standard incandescent dimmer. See LED bulb manufacturer spec for dimmer compatibility. Ceiling cutout 3.25 inch. A complete fixture consists of a housing and trim, sold separately.





<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	50W
<b>DIMMER</b>	Dimmable
<b>DIMENSIONS</b>	8"L x 5.5"W x 4.5"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	1 x MR16/GU10/50W/120V Halogen 1 x MR16/GU10/10W/120V LED

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	New Construction NON IC
<b>HOUSING HEIGHT</b>	5"
<b>APERTURE SIZE</b>	3.000"

**SPEC #** BEA188686

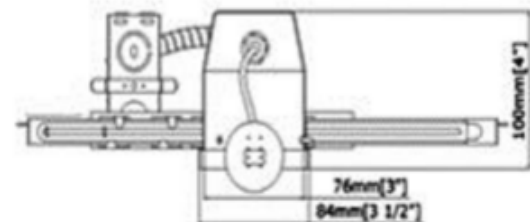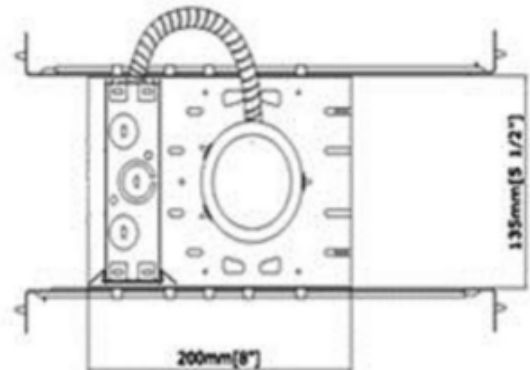

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE