



BRAND

Lightolier by Signify

DESCRIPTION

1004ICR Lytecaster Lytening 5 Inch Incandescent Convertible IC/Non-IC Remodel Frame-In-Kit is made of aluminum and is suitable for use in both IC insulated and Non-IC non-insulated ceilings up to 2 inches thick. UL listed. Suitable for damp locations. 5 3/8 inch diameter ceiling opening. 11.4 inch width x 5.25 inch depth x 7.5 inch height. Optional AirSeal kit available, sold separately. Enclosed diffuser trims 1021, 1024 and 1090, and wall wash trim 1085 for Non-IC applications only. Lamp type and wattage dependent on frame-in kit/trim combination. A complete fixture includes a frame-in kit and a trim kit, sold separately.




TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	75W
DIMMER	Dimmable
DIMENSIONS	11.4"W x 7.5"H x 5.25"D
BULB NOT INCLUDED	
LAMP	1 x PAR30S/Medium (E26)/75W/120V Halogen 1 x PAR30S/Medium (E26)/120V LED 1 x A19/Medium (E26)/120V LED 1 x A19/Medium (E26)/120V Incandescent 1 x BR30/Medium (E26)/120V Halogen

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	8"
APERTURE SIZE	5.000"

SPEC

LTL18977

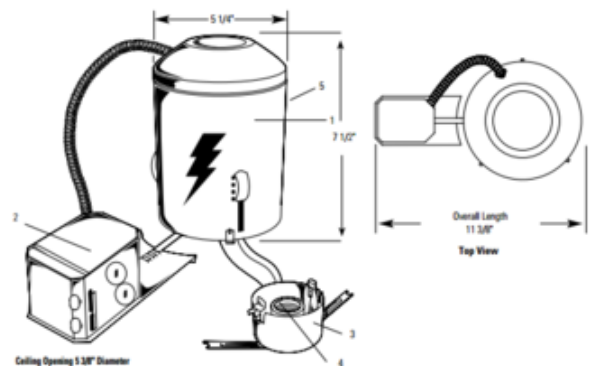

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE