



BRAND

Lightolier by Signify

DESCRIPTION

1104SIC Lytecaster Lytening 6.75 Inch Shallow Incandescent IC New Construction Frame-In Kit is made of 20 gauge aluminum and features integral retaining spring to secure housing to ceilings up to 2 inches thick. IC designation indicates that housing is thermally protected and can be covered with insulation. Can be removed for access to junction box and ceiling plenum. 5.5 inch tall for use in 2 x 6 inch joist construction and shallow ceiling plenum applications. Includes mounting bars to accommodate 16 to 24 inch on center joist spacing. UL listed for maximum of eight 12 gauge 90 degree through branch circuit conductors. Integral cable clamps permit attachment of non-metallic 12 or 14 gauge Romex cable without tools or additional connectors. One 75 watt 120 volt A19 medium base incandescent lamp is required, but not included. UL listed for damp locations and convertible IC/Non-IC. Energy Star. Title 24 compliant. AirSeal kit available, sold separately. 10.75 inch length x 7.3 inch width x 5.5 inch height. 7 inch cutout. A complete fixture includes a frame-in kit and trim kit, sold separately.




| | |
|--------------------------|---|
| TRIM COLOR | N/A |
| BODY FINISH | Aluminum |
| WATTAGE | 75W |
| DIMMER | Standard 120V |
| DIMENSIONS | 10.75"L x 7.3"W x 5.5"H |
| BULB NOT INCLUDED | |
| LAMP | 1 x A19/Medium (E26)/75W/120V Incandescent 1 x A19/Medium (E26)/120V LED |

Technical Information

| | |
|-----------------------|---------------------|
| CEILING TYPE | Drywall with Trim |
| HOUSING TYPE | New construction IC |
| HOUSING HEIGHT | 6" |

SPEC # LTL19093

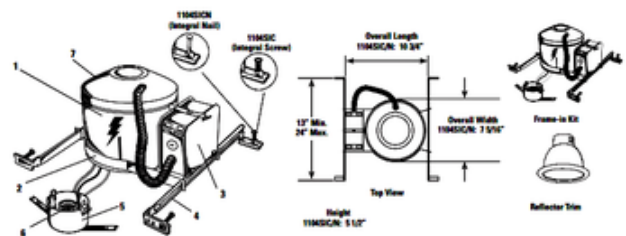

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
| | | | | |