



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Verge Wall is a slim plaster-in aluminum channel with a 4 inch paintable aluminum backer plate. The channel highlights the transition where two drywall surfaces verge together, while emitting ambient illumination. Mounts directly to studs without joist modification and plasters into 5/8 inch or thicker drywall. Verge houses a single row of commercial grade LEDs available in a spectrum of color temperatures. Consumes 2.5 LED watts per foot and is sold in 5 foot increments up to 40 feet. Verge may be field-cut to any length. May be powered using a Class 2 electronic low voltage (ELV) or 0-10V power supply. For indoor applications only. Included components: Junction Box, Adjustable Mounting Bars, Verge Wall Channel(s), Backer Plate, Drywall Screws, LED Soft Strip, and Lens(es). A VG-1RE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). ETL listed. Suitable for damp locations. 5 year pro-rated warranty. Required power supply, dimmer control, and optional mounting accessories sold separately. Product is built to order. Note: Limited quantities available.



SHADE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	12.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.62"W x 4"H
INTEGRATED LED MODULE	
LAMP	5 x LED/24V LED


Technical Information

LUMINOUS FLUX	930 lumens
LUMENS/WATT	372.00
LAMP COLOR	2200K
COLOR RENDERING	85 CRI

SPEC # EDG203622



INCLUDED COMPONENTS

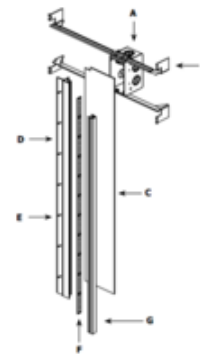

- A. Junction Box:** Mounts behind drywall with Adjustable Mounting Bars. Low voltage 24VDC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is covered by the Backer Plate, and required at the beginning of each run.
- B. Adjustable Mounting Bars:** Provide flexibility for mounting in a variety of spaces. Verge Corner includes two sets of mounting hardware.
- C. Backer Plate:** 4-inch paintable aluminum plate that conceals Junction Box and reflects light. Verge Corner includes two backer plates.
- D. Verge Channel:** 5/8 inch deep extrusions each house a single row of commercial-grade white or dynamic color-changing LED Soft Strip.
- E. Drywall Screws:** Secure channel to drywall and stud.
- F. LED Soft Strip:** Commercial grade white or dynamic color-changing LED Soft Strip. See lamp data on for additional details.
- G. Lens:** .6 inch wide diffuser lens projects a clean line of light without LED dots. Verge Corner includes two lenses.

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE