

# IL116G Inground Uplight with Rock Guard




**Description:**

IL116G Inground Uplight housing is fabricated from a single piece of compression-molded fiberglass reinforced polyester composite, pressure tested to ensure water will not wick or leak through. Finish in Bronze. Trim ring and Rock Guard is a textured composite material. Clear, convex, tempered, soda-lime glass for high impact resistance. 2200 pound live-load rated, standard walk-over lens. One 75 watt 12 volt GU5.3 MR16 halogen lamp is required, but not included. Covered MR16 lamp is recommended to protect inner capsule lamp. Pre-wired with 3 foot pigtail of 18-2 AWG wire. Includes low voltage quick connector LVC3 for easy hook up to the low voltage supply cable not included. 6.6 inch diameter x 8.4 inch height. ETL listed for wet locations. Required remote transformer and optional mounting and optical accessories sold separately.

Shown in: Bronze / Clear

**List Price:** \$227.40  
**Our Price:** \$136.44

**Shade Color:** Clear  
**Body Finish:** Bronze  
**Lamp:** 1 x MR16/GU5.3 (bipin)/75W/12V Halogen  
 1 x MR16/GU5.3 (bipin)/12V LED  
**Wattage:** 75W  
**Dimmer:** Dimmable  
**Dimensions:** 8.4"H x 6.6"W

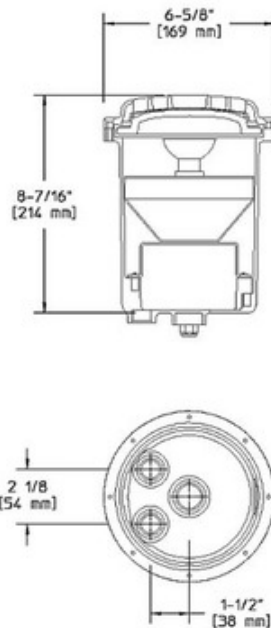

Product Number: <b>HAD21644</b>			
Company:		Fixture Type:	Date: Mar 23, 2018
Project:		Approved By:	

#0810EG-IL116G-009H1-CLBZ

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com