



### BRAND

Contrast Lighting

### DESCRIPTION

Eco Series 2 LED 3.5 Inch Insulated Ceiling AirTight Remodel Housing with electronic driver is made of galvanized steel construction and features below ceiling accessibility for maintenance. Perfect fit to ceiling with no light leakage. Approved for installation in insulated ceiling with direct contact to insulating material (except polyurethane). Can fit ceiling up to 7/8 inch thick. Requires a 7 inch clearance beyond the ceiling level. Cutout diameter: 3 5/8 inch. Patented hook for ease of installation and a perfect fit into ceiling. Junction box can support up to 10 x 14 or 8 x 12 gauge wires. Thermal protection up to 90 degrees C. Includes 120 volt 9 watt LED driver with 11 watt power consumption. Dimmable per attached ECOLED2 dimmer compatibility list. Dimensions: 13.2 inch width x 4.6 inch depth x 5.6 inch height. Suitable for damp locations. Suitable for wet locations using Marine Grade/WET compatible trims. Title 24. ASTM E283. Includes 5 year warranty on LED driver. A complete fixture consists of a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	9W
DIMMER	Dimmable
DIMENSIONS	13.2"W x 5.6"H x 4.6"D
BULB NOT INCLUDED	
LAMP	1 x LED/120V LED

#### Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel IC
HOUSING HEIGHT	6"

SPEC #

CLT230937

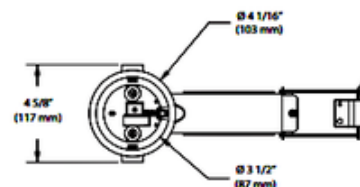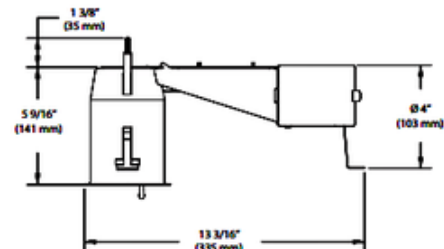

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE