




BRAND

Contrast Lighting

DESCRIPTION

Concerto LED 3.5 Inch ELV Dim Performance 2 Non-IC Remodel Housing is available in a 120 Volt Performance 2 (23 watt/2000 lumen) option only. Non-IC designation requires that insulation must be kept a minimum of 3 inches away from housing. Housing requires a 7 inch minimum clearance beyond ceiling level. Ceiling cutout: 3 5/8 inch. UL listed for damp and wet locations. Dimmable with a low voltage electronic dimmer (see attached manufacturer dimmer compatibility reference). A complete fixture includes a housing and trim, sold separately.


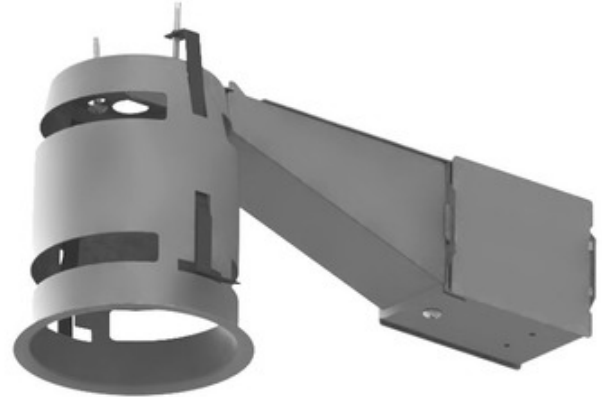


TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	23W
DIMMER	Low Voltage Electronic
DIMENSIONS	13"W x 5.5"H x 4.63"D
INTEGRATED LED MODULE	
LAMP	1 x LED/23W/120V LED

Technical Information

LUMINOUS FLUX	2000 lumens
LUMENS/WATT	86.96
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC

SPEC # CLT235488

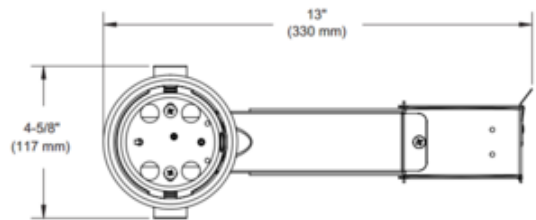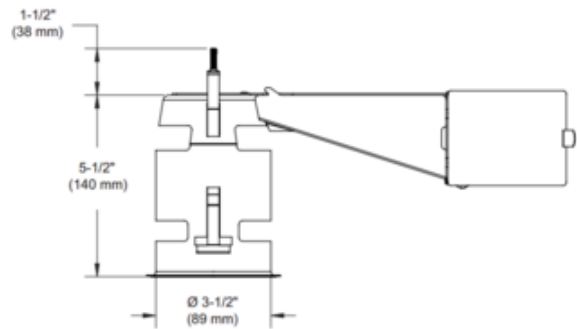

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE
