

RL530 5 Inch New Construction Non-IC Housing



Description:

RL530 5 Inch New Construction Non-IC Housing is designed for non insulated new construction installations. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. One 120 volt, PAR30, BR30, R20, PAR20 or A-type medium base halogen bulb or LED equivalent is required, but not included. Lamp type and wattage dependent on housing/trim combination (see attached manufacturer specification). Halogen and incandescent dimmable with a standard incandescent dimmer. Consult bulb manufacturer for dimmer compatibility when using LED equivalent bulb option. cULus listed. Suitable for damp locations. 8 inch width x 11.5 inch length x 7 inch height. A complete fixture includes a housing and trim, sold separately.




Shown in: Aluminum

List Price: \$40.00
 Our Price: \$24.00

- Shade Color: N/A
- Body Finish: Aluminum
- Lamp:
 - 1 x PAR30/Medium (E26)/75W/120V Halogen
 - 1 x BR30/Medium (E26)/65W/120V Incandescent
 - 1 x A19/Medium (E26)/75W/120V Incandescent
 - 1 x PAR20/Medium (E26)/50W/120V Halogen
 - 1 x R20/Medium (E26)/50W/120V Incandescent
 - 1 x PAR20/Medium (E26)/120V LED
 - 1 x PAR30L/Medium (E26)/120V LED
 - 1 x A19/Medium (E26)/120V LED

Technical Information

- Ceiling Type: Drywall with trim
- Housing Type: New Construction NON-IC
- Wattage: 75W
- Housing Height: Dimmable
- Aperture Size: 0.000
- Dimensions: 11.5" L x 7" H x 8" W

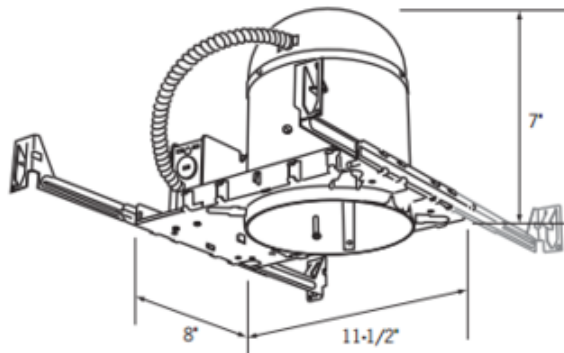

Ceiling Opening: 5-3/4"

Product Number: CNT24457			
Company:		Fixture Type:	Date: Apr 26, 2018
Project:		Approved By:	

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com