



BRAND Juno Lighting



DESCRIPTION

TC20R 5 Inch Universal Non-IC Remodel Housing is for remodel application where back side of ceiling is not accessible. Installs through an opening in the ceiling from below. Secured in place by factory installed remodel springs. Accommodates ceiling thickness up to 1 1/8 inch. Design for use in non-insulated areas. If installed where insulation is present, the insulation must be pulled back 3 inches from all sides of the housing. One 120 volt, A19, BR30, PAR30, PAR20, R20, PAR30L or A15 medium base lamp or LED equivalent is required, but not included. Lamp type and wattage dependent upon housing/trim combination (see attached Juno manufacturer specification). Incandescent/halogen dimmable with a standard incandescent dimmer. Consult lamp manufacturer for dimmer compatibility when using an LED equivalent lamp. UL listed for through-branch wiring, damp locations and IP. Trims 210N, 211 and 212N are wet location approved for covered ceiling applications. Trims 215 and 216 are wet location approved for covered ceiling applications when used with outdoor rated lamps. 12.5 inch length x 5.9 inch width x 7.5 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Aluminum

TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	N/A
DIMMER	Dimmable
DIMENSIONS	12.5"L x 5.875"W x 7.5"H
BULB NOT INCLUDED	
LAMP	1 x BR30/Medium (E26)/120V Incandescent 1 x A19/Medium (E26)/120V LED 1 x BR30/Medium (E26)/120V Halogen 1 x BR30/Medium (E26)/120V LED 1 x PAR20/Medium (E26)/120V Halogen
Technical Information	
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	8"
PRODUCT DIMENSIONS	Ceiling Cutout: 5.50 in
SPEC #	JUN26383

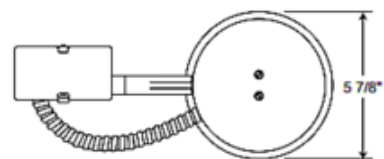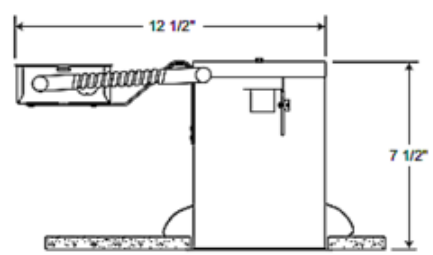

5 1/2" CEILING CUTOUT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE