



BRAND

Contrast Lighting

DESCRIPTION

Evolution Series IT3000T-LED GU10 MR16 LED IC AirTight Remodel Housing is made of 18 gauge galvanized steel and is approved for installation in insulated ceiling with direct contact to insulating material (except polyurethane). Below ceiling accessible. Requires a 6 inch clearance beyond the ceiling level. Designed for 120 volt, 9.8 watt GU10 base MR16 LED lamp, sold separately. See lamp manufacturer for dimmer compatibility. Can fit in ceilings up to 7/8 inch thick. UL listed for damp locations. Ceiling cutout 3 5/8 inch. Housing dimensions: 10.75 inch length x 4.6 inch width x 4.5 inch height. A complete fixture consists of a housing and trim. Trim sold separately.





TRIM COLOR	N/A
BODY FINISH	N/A
WATTAGE	10W
DIMMER	Low Voltage Electronic
DIMENSIONS	10.75"L x 4.6"W x 4.75"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU10/120V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel IC
HOUSING HEIGHT	6"
APERTURE SIZE	3.500"

SPEC #	CLT332162
--------	-----------

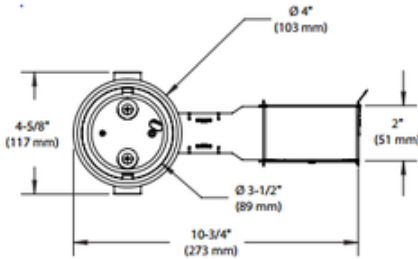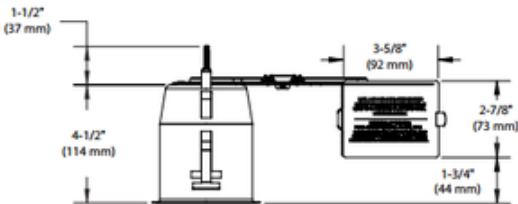

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE