



BRAND

WAC Lighting

DESCRIPTION

Tesla 3.5 Inch LED New Construction IC Airtight Housing and junction box is made of 20 gauge steel with frame and hanger bars in heavy gauge galvanized steel. Suitable for direct contact with insulation. Three knockouts and three Romex style wiring connectors provided for ease of installation. Supplied with hanger bars adjustable from 14.5 to 24.5 inches including a captive mounting screw nail and integral t-bar clamps. Accommodates surfaces from .50 to .75 inch thickness. Rated for branch wiring. Includes universal electronic driver, 120-277V AC 50/60Hz input, 21.5 watt output. 4 5/8 inch cut out. UL listed. 120 volt may be dimmed to 15 percent with an electronic low voltage dimmer, sold separately. 120-277 volt may be dimmed to 10 percent with a 0-10V dimmer, sold separately. Note: A complete fixture requires a housing and trim, sold separately.




Shown in: Galvanized

TRIM COLOR	N/A
BODY FINISH	Galvanized
WATTAGE	21.5W
DIMMER	Dimmable
DIMENSIONS	18.4"W x 5.6"H x 10.1"D
INTEGRATED LED MODULE	
LAMP	1 x LED/21.5W/120V LED

Technical Information

FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	6"

SPEC # WAC376882

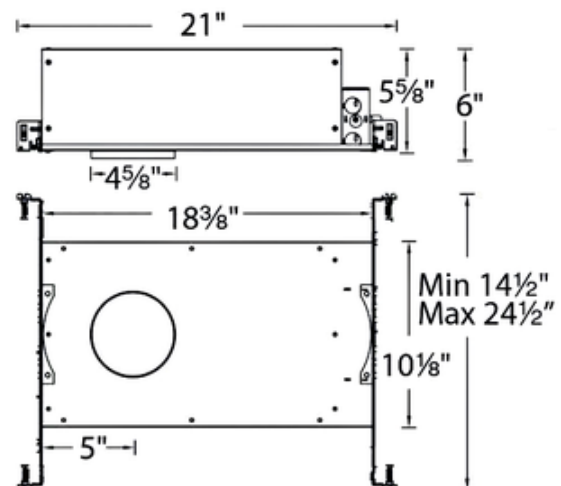

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE