

ISMR3000E35 3.5 Inch 35W ELV IC New Construction Housing



Description:

ISMR3000E35 3.5 Inch Low Voltage IC Airtight New Construction Housing is designed for insulated new construction applications. IC designation allows housing to be in direct contact with insulation. Below ceiling accessible. Takes up to a 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 35 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3.75 inch ceiling cut out. 15.25 inch length x 8.25 inch width x 7.9 inch height. A complete fixture includes a housing and trim, sold separately.




Shown in: Galvanized Steel

List Price: \$174.50
 Our Price: \$106.79

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/35W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 35W
 Dimmer: Low Voltage Electronic
 Dimensions: 15.25"L x 7.9"H x 8.25"W

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: New construction IC Airtight
 Housing Height: 8"
 Aperture Size: 3.500"
 Product Dimensions: Cutout 3 3/4"

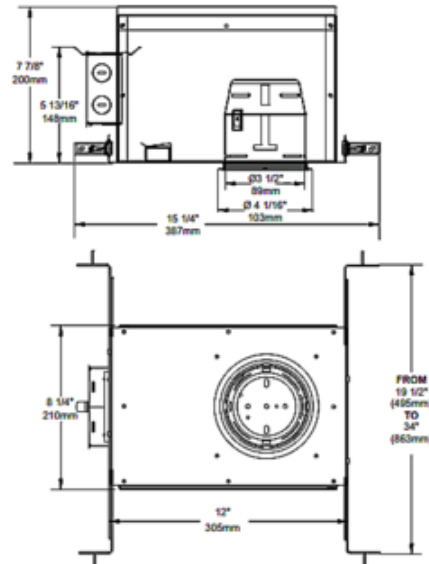

Product Number: CLT3792			
Company:		Fixture Type:	Date: Apr 25, 2018
Project:		Approved By:	