

IT2000CE 4 Inch 42W ELV Non-IC Shallow Remodel Housing



Description:

IT2000CE 4 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes from 1/2 to 1.25 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 42 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3 5/8 inch ceiling cut out. 13.6 inch length x 5 inch width x 3.75 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Galvanized Steel

List Price: \$101.00
 Our Price: \$72.72

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/42W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 42W
 Dimmer: Low Voltage Electronic
 Dimensions: 13.6"L x 3.75"H x 5"W

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Housing Height: 4"
 Aperture Size: 4.000"
 Product Dimensions: Cutout 4 1/4"

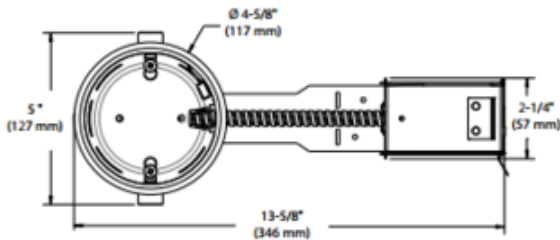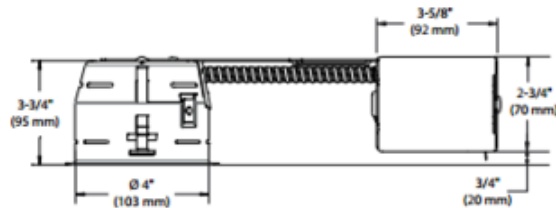

Product Number: CLT3799			
Company:		Fixture Type:	Date: Mar 21, 2018
Project:		Approved By:	

#0314RE-IT2000C-005H1-OOMT

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com