

IT3000CE 3.5 Inch 35-37W ELV Non-IC Shallow Remodel

Housing





**Description:**

IT3000CE 3.5 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to a 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 35-37 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3 5/8 inch ceiling cut out. 11.6 inch length x 4.7 inch width x 3.7 inch height. A complete fixture includes a housing and trim, sold separately.

Shown in: Galvanized Steel

List Price: \$101.00  
 Our Price: \$72.72

Shade Color: N/A  
 Body Finish: Galvanized Steel  
 Lamp: 1 x MR16/GU5.3 (bipin)/37W/12V Halogen  
 1 x MR16/GU5.3 (bipin)/12V LED  
 Wattage: 37W  
 Dimmer: Low Voltage Electronic  
 Dimensions: 11.6"L x 3.7"H x 4.7"W

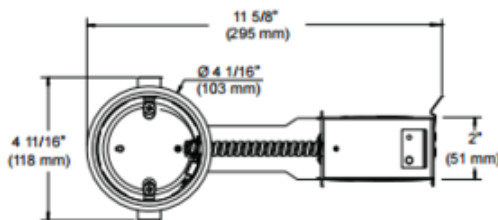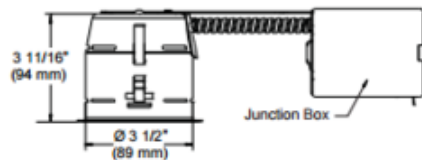

**Technical Information**

Ceiling Type: Drywall with Trim  
 Housing Type: Remodel NON IC  
 Housing Height: 4"  
 Aperture Size: 3.500"  
 Product Dimensions: Cutout 3 5/8"

Product Number: <b>CLT3801</b>			
Company:		Fixture Type:	Date: Mar 25, 2018
Project:		Approved By:	

#0314RE-IT3000CE-004H1-XXX

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com