


IT4000M 3 Inch 20-35W MLV Non-IC Remodel Housing



Description:

IT4000M 3 Inch Low Voltage Non-IC Remodel Housing is equipped with thermal protection and is designed for remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage magnetic transformer is included. One 20-35 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 3.25 inch ceiling cut out. 13 inch length x 4.25 inch width x 6 inch height. A complete fixture includes a housing and trim, sold separately.

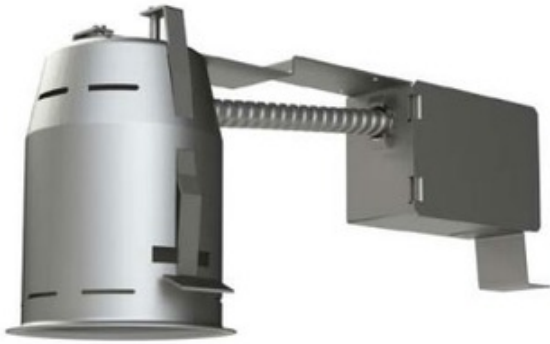



Shown in: Galvanized Steel

List Price: \$91.00
 Our Price: \$65.52

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/35W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 35W
 Dimmer: Low Voltage Magnetic
 Dimensions: 13"L x 6"H x 4.25"W

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Housing Height: 6"
 Aperture Size: 3.000"

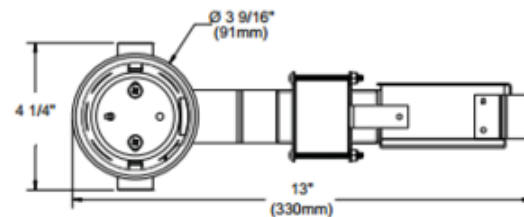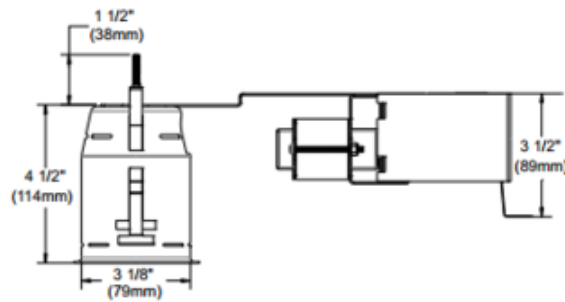

Product Number: CLT3807			
Company:		Fixture Type:	Date: Mar 24, 2018
Project:		Approved By:	