




### BRAND

Contrast Lighting

### DESCRIPTION

IT5000CM 2.5 Inch Low Voltage Non-IC Remodel Shallow Housing is equipped with thermal protection and is designed for remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer is included. One 20 watt, 12 volt GU4 MR11 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Suitable for damp locations. UL listed. 2 5/8 inch ceiling cut out. 11.75 inch length x 3.7 inch width x 3.25 inch height. A complete fixture includes a housing and trim, sold separately.

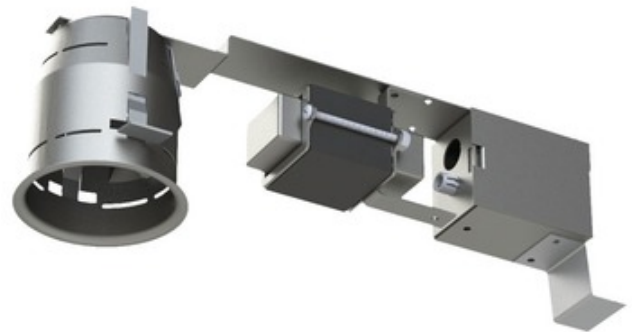



TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	20W
DIMMER	Low Voltage Magnetic
DIMENSIONS	11.75"L x 3.7"W x 3.25"H
BULB NOT INCLUDED	
LAMP	MR11/Bipin/20W/12V Halogen

#### Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	4"
APERTURE SIZE	2.500"

SPEC #

CLT3808

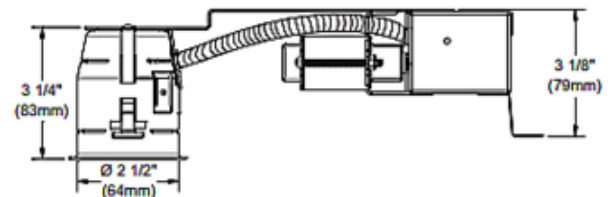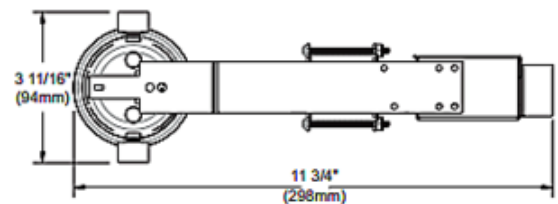

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE