



BRAND Contrast Lighting

DESCRIPTION

NW2000CM 4 Inch Low Voltage Non-IC Shallow New Construction Housing is a thermally protected housing designed for non-insulated new construction applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer is included. One 50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage dimmer compatibility when using LED bulb option. 4.25 inch ceiling cut out. 14.5 inch length x 10 inch width x 3.5 inch height. A complete fixture includes a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Low Voltage Magnetic
DIMENSIONS	14.5"L x 10"W x 3.5"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/50W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	4"
APERTURE SIZE	4.000"

SPEC # CLT3813

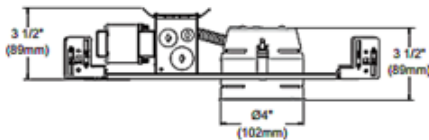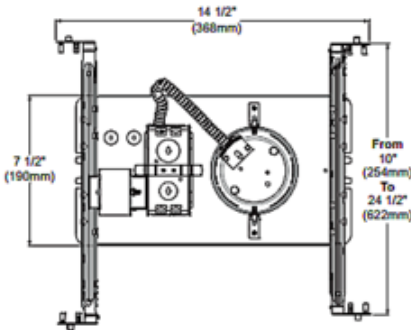

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE