




BRAND

Contrast Lighting

DESCRIPTION

NW4000M 3 Inch Low Voltage Non-IC New Construction Housing is designed for new construction applications and damp locations. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 1.5 inch ceiling thickness. Low voltage 12 volt magnetic transformer included. One 20-35 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 3.25 inch cut out. 15.38 inch length x 10 inch width x 4.5 inch height. A complete fixture includes a housing and trim, sold separately.


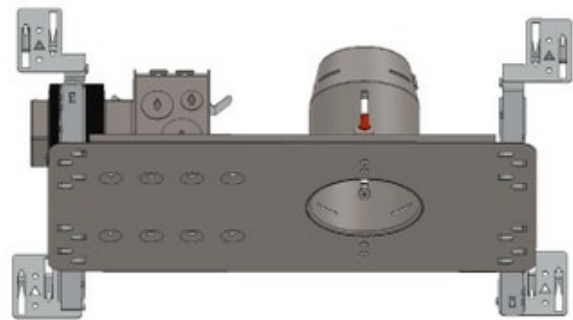


TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	35W
DIMMER	Low Voltage Magnetic
DIMENSIONS	11.4"L x 7.3"W x 4.6"H
BULB NOT INCLUDED	
LAMP	MR16/GU5.3 (bipin)/35W/12V Halogen MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	5"
APERTURE SIZE	3.000"

SPEC #	CLT3817
--------	---------

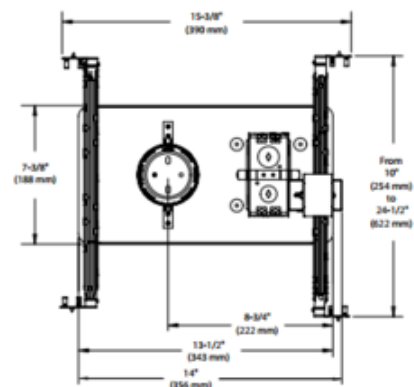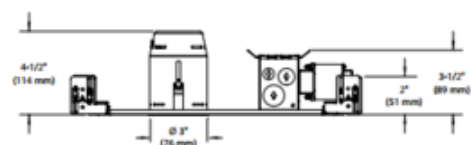

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE