



BRAND

WAC Lighting

DESCRIPTION

Summit 3.5 inch Round Trim Non IC Recessed Downlight includes housing and trim and does not require use of a driver. Suitable for new construction and remodel applications. Available with a White trim and Frosted lens for glare control and optimal light distribution. Frame and hanger bars in heavy galvanized steel. Two knockouts. Rated for branch wiring. Supplied with hanger bars, adjustable from 14.5 to 25 inches to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting screw-nail for ease of installation. Accommodates surfaces 0.5 to 0.75 inches thick. 4.625 inch cutout hole. Non IC: requires 3 inch clearance from insulation. Integrated 14.5 watt 120 volt 90CRI, 3000K 45 degree flood beam angle LED light source. Dims to 10% with low-voltage electronic dimmers. ETL listed for wet locations.




SHADE COLOR	Frosted
BODY FINISH	White
WATTAGE	14.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	25"L x 12.5"W x 5.63"H
INTEGRATED LED MODULE	
LAMP	1 x LED/14.5W/120V LED

Technical Information

LUMINOUS FLUX	910 lumens
LUMENS/WATT	62.76
LAMP COLOR	3000K
COLOR RENDERING	90 CRI
LAMP LIFE	50000 hours
FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	6"

SPEC #	WAC423980
--------	-----------

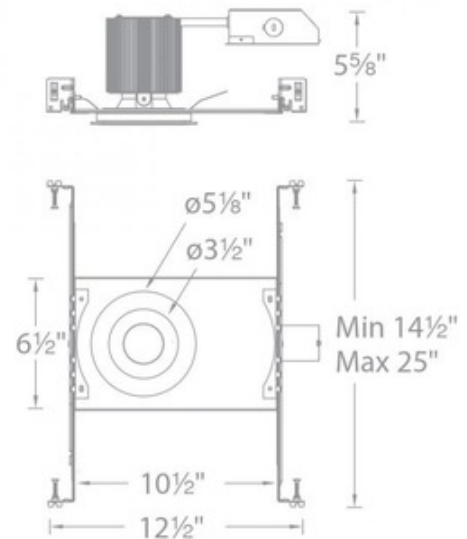

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE