



BRAND

Juno Lighting

DESCRIPTION

Aculux 3.25 Inch Non-IC New Construction low profile housing is ideal for space-restricted plenum applications and is designed to fit 2 x 6 construction. The housing is designed for use in non-insulated areas or where insulation is spaced at least 3 inch from housing. Features Acu-Aim geared hot aiming for 370 degree rotation and 45 degree tilt. Deep lamp regression and optimized beam center provide 45 degree lamp/lamp image cut-off for exceptional low aperture. Suitable for wet locations with certain trims. Available with an electronic low voltage (ELV) or magnetic low voltage (MLV) transformer. Lamp type/wattage dependent upon housing/trim combination. Note: A complete fixture requires a housing and trim, sold separately.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	75W
DIMMER	Low Voltage Magnetic
DIMENSIONS	18"W x 5.4"H x 13.75"D
BULB NOT INCLUDED	
LAMP	MR16/GU5.3 (bipin)/75W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	6"

SPEC # JUN52454

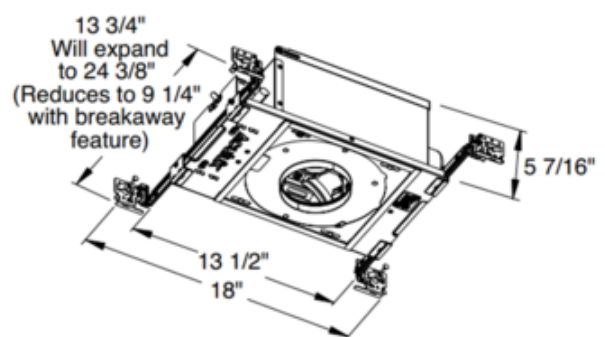

4 1/4" CEILING CUTOUT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE