



BRAND


PureEdge Lighting

DESCRIPTION


The PSB-25-010-24VDC power supply accepts input voltage of 120-277VAC and outputs 24VDC power up to 25 watts. Can be used as a dimmable or non-dim power supply. The enclosure provides space inside for electrical connections. Features short circuit and overload and over temperature protection. Power Input: 120-277 volts AC. Power Output: Class 2, 24 volts DC 1A, 25 watts maximum. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing (6 inch) among power supplies when multiple power supplies are installed in the same remote location. Surface mounting with conduit access. Indoor applications only. ETL listed. 12.4 inch width x 3.12 inch depth x 2.18 inch height. The low voltage output dims down to 7 percent when two additional wires are connected to a 0-10V dimmer. Dimmable with Lightolier Philips Signify: Sunrise SR1200ZTUNV, Lutron Radio Ra2 (with GRX-TVI), Lutron Grafik Eye Qs (with GRX-TVI), Lutron Nova T DTV, or Leviton IP710-DL dimmer, sold separately. Dimming Curve: Linear, Logarithmic 100 to 1 percent (HydraDrive).



| | |
|--------------------------|--------------------------|
| SHADE COLOR | N/A |
| BODY FINISH | White |
| WATTAGE | 25W |
| DIMMER | 0-10V |
| DIMENSIONS | 12.4"W x 2.18"H x 3.12"D |
| BULB NOT INCLUDED | |
| LAMP | LED/25W/24V LED |

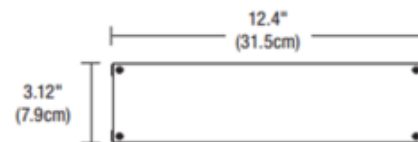

Top View

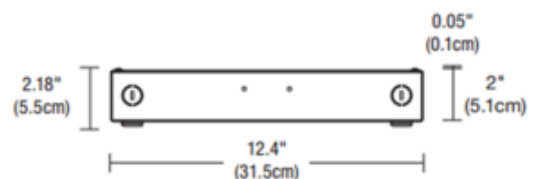

Side View

SPEC # EDG77294

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
| | | | | |