


# ASSEMBLY & INSTALLATION INSTRUCTIONS

C96

272102 Pression LED Table Lamp

---

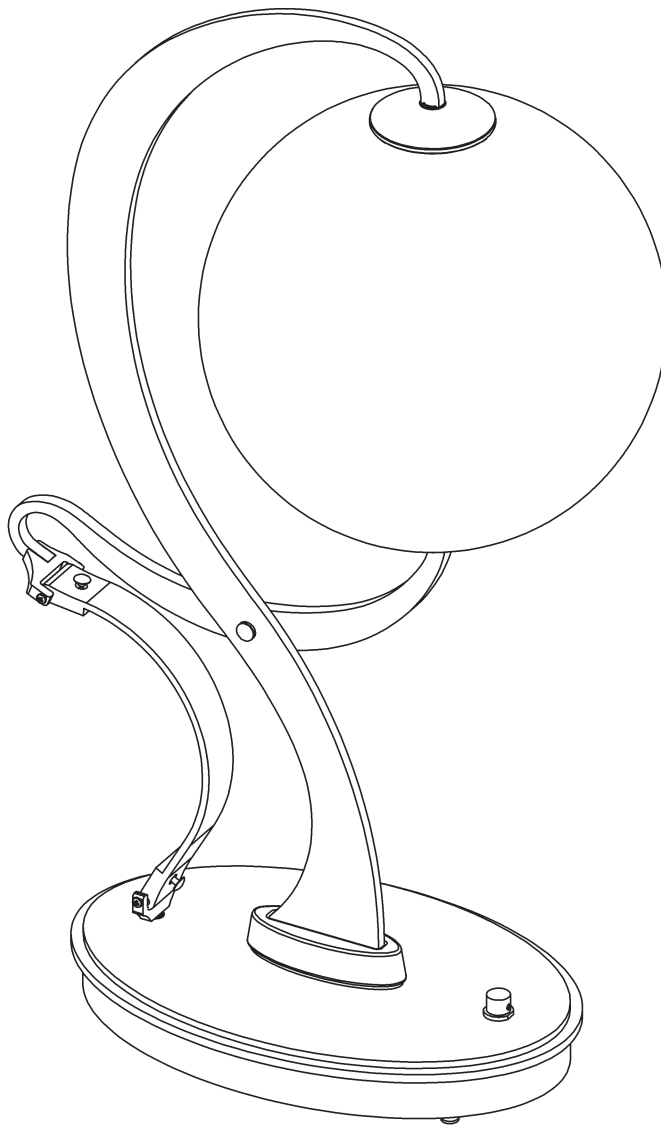

**Component Parts**

<b>A</b>	<b>LED Core</b>
<b>B</b>	<b>Glass</b>
<b>C</b>	<b>Endcap (2)</b>
<b>D</b>	<b>Stud</b>
<b>E</b>	<b>Brass Pin</b>
<b>F</b>	<b>Bushing (2)</b>
<b>G</b>	<b>Fixture</b>
<b>H</b>	<b>Bottom Arm</b>
<b>I</b>	<b>Set Screw</b>
<b>J</b>	<b>Hex Wrench</b>
<b>K</b>	<b>Leather</b>
<b>L</b>	<b>Screw (4)</b>




**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## Assembly Glass Globe (Figures 1)

1. Carefully unpack fixture from carton.
  2. Locate glass (B) and LED core (A).
  3. Remove endcap (C) without label. It will be on the end with the brass pin (E).
  4. Place glass (B) over LED core (A) until it rests in endcap (C).
  5. Re-install endcap (C) over brass pin (E) and thread together until snug.
- Note:** Be careful not to overtighten as this could break glass.
6. Thread bushing (F), found in kit bag, onto brass pin until flush with endcap (C).
  7. Follow instructions on next page to complete fixture assembly.

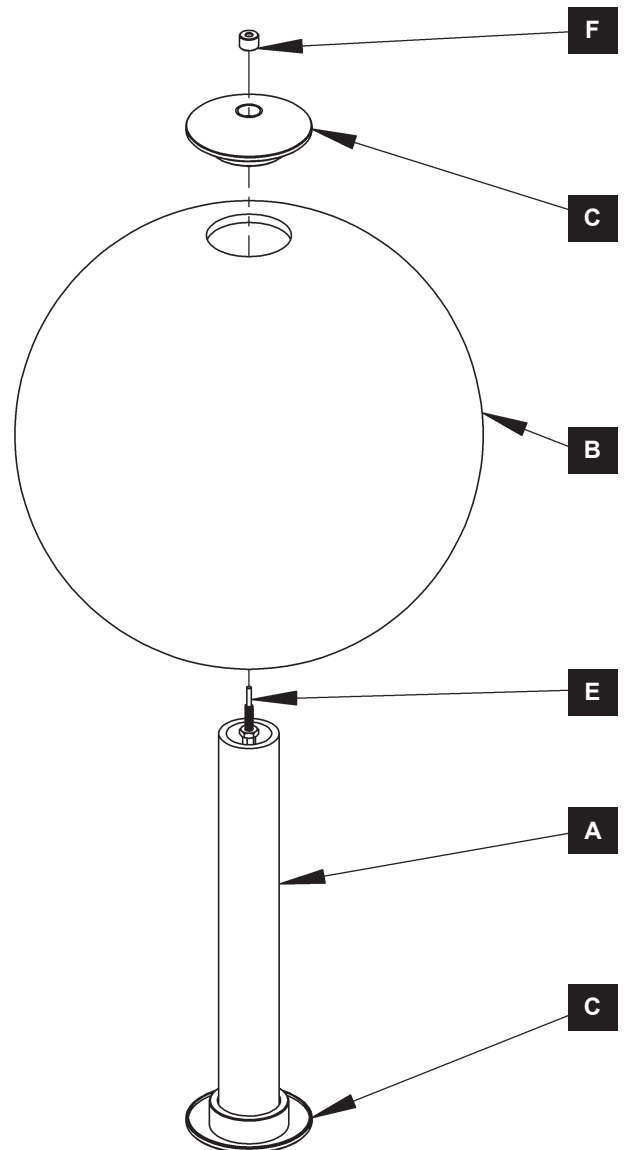

(Figure 1)

272102 Pression LED Table Lamp

**Install Glass Globe** (Figures 2 & 3)


1. Locate endcap (C) with (+) label.
2. Thread stud (D) from (+) endcap (C) into top of fixture (G) until it stops.

**Note:** Make sure bottom arm (H) is positioned below glass (B) as seen in Figure 2.


3. Rotate bottom arm (H) up and insert brass pin (E) into hole in top of arm.

**Note:** It may be necessary to loosen set screw (I) before pin will install completely into bottom arm. Hex wrench can be found in kit bag.

4. With arm up against bushing (F), tighten set screw (I) with provided wrench (J).
5. Once glass (B) installation is complete, tighten all screws (L) that hold leather strap (K)
6. Plug in power cord.

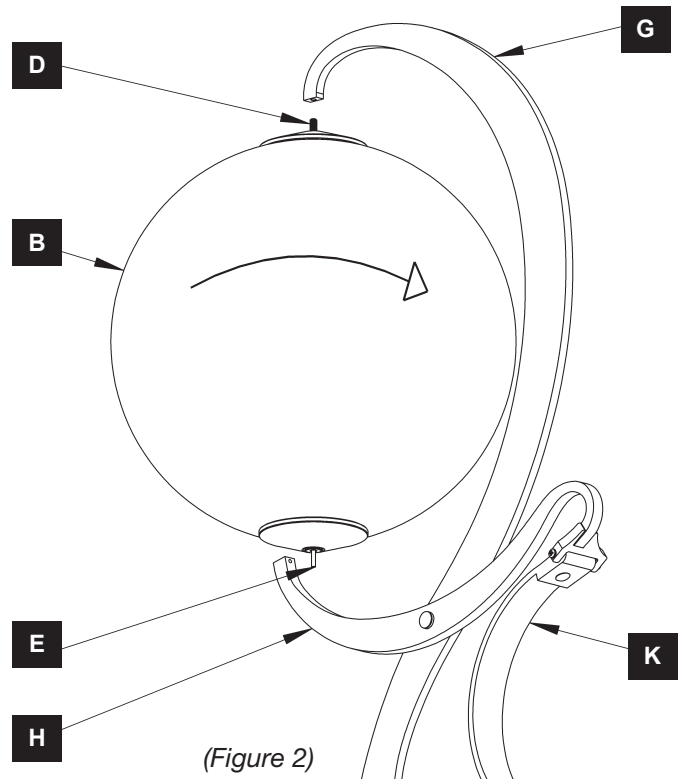

(Figure 2)

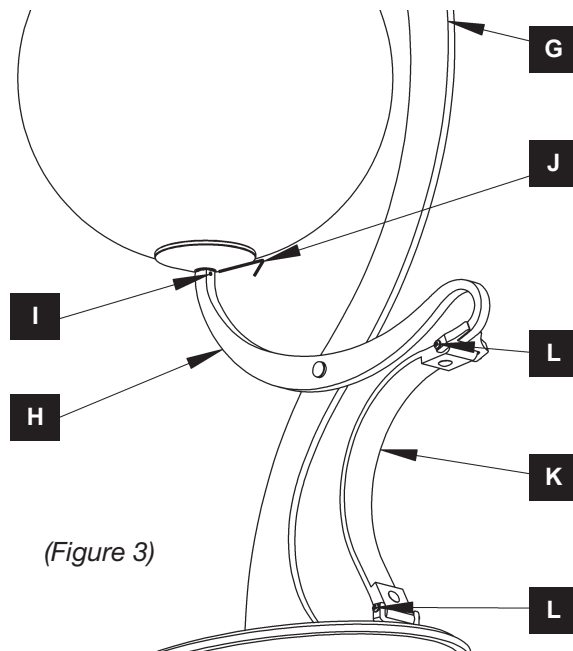

(Figure 3)

**Leather Screws**  
To avoid light flickering, be sure all four screws (L) are tight.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.