

Component Parts

A Leg 1 - Socket

B Leg 2 - Pin

C Leg 3

D Flat Head Screw (2)

E Accent Plate

F Ball (3)

G Socket

H Harp Holder

I Socket Knob

J Bulb

K Harp

L Locks (2)

M Shade

N Finial

ASSEMBLY & INSTALLATION INSTRUCTIONS



Tryst Tripod Floor Lamp - 241102

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJU-RY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


Assemble Fixture (Figure 1 & Figure 2 - on following page)

- 1. Carefully unpack all parts from the carton.
- 2. Locate Leg 1 (A). It will have a pipe and socket attached to it.
- Locate Leg 2 (B). It will have a pin installed in the welded washer.
- 4. Orient leg 2 (B) so that pin slides into alignment hole and countersunk hole lines up with threaded hole in leg 1.
- 5. Install screw (D) through leg 2 (B) and thread into leg 1 (A). Tighten to secure legs.

See Figure 2 on next page for following steps.

- 6. Locate leg 3 (C).
- 7. Orient leg 3 (C) so that alignment hole slides over installed screw from step 5. Countersunk hole should line up with remaining threaded hole in leg 1 (A).
- 8. Install screw (D) through leg 3 (C) and thread into leg 1 (A). Tighten to secure all legs.

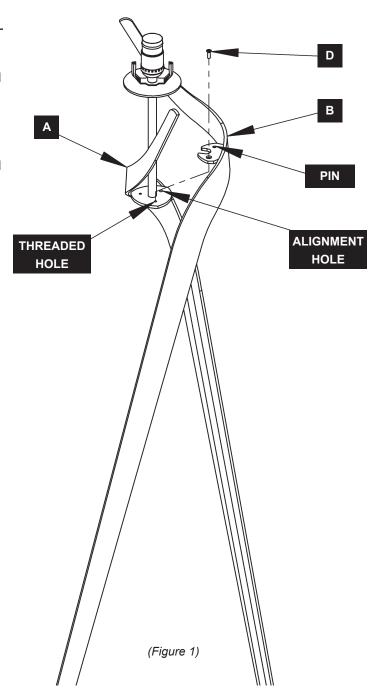

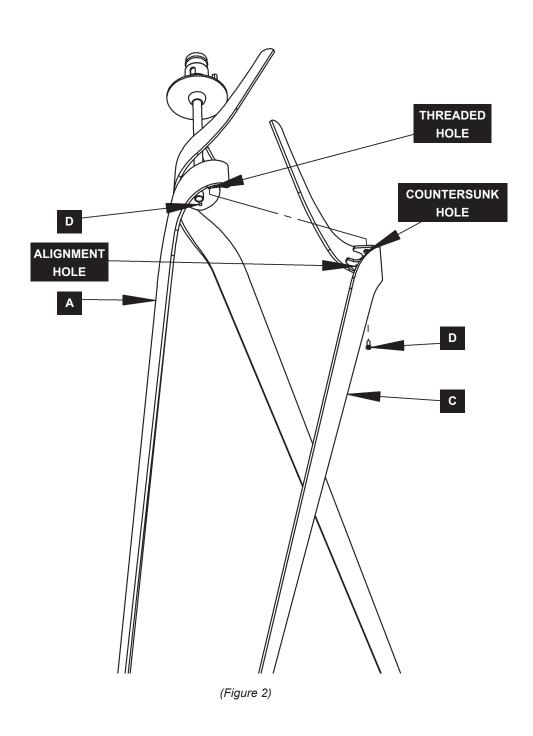


Tryst Tripod Floor Lamp - 241102

Complete Lamp Assembly (Figure 2)

- 1. Locate accent plate (E). Remove (3) balls (F) that ship installed on accent plate (E).
- 2. Place accent plate (E) in between legs until studs align with holes in plate.

Note: It may be necessary to flex legs to get accent plate into correct position.

- 3. Re-install balls (F) onto studs in accent plate (E) and tighten against plates.
- 4. Install turn knob (I) onto socket (G).
- 5. Install bulb (J) into socket (G).
- Finial (N) is shipped installed on harp (K).
 Remove finial (N) from harp (K) and save for later use.
- 7. Squeeze harp (K) together while holding the locks (L) up towards the top of the harp and slip into harp holder (H).
- 8. Allow locks (L) to slip down harp (K) and onto harp holder (H) to secure harp in place.
- 9. Set shade (M) onto threaded stud on top of harp (K).
- Thread finial (N) onto threaded stud on harp (K) and tighten until snug. Be careful not to over tighten.
- 11. Plug in power cord.

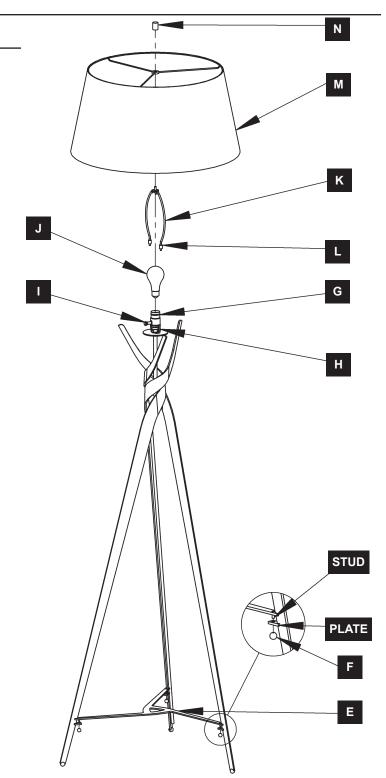

(Figure 3)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

