


# CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #LOF-5005-PN

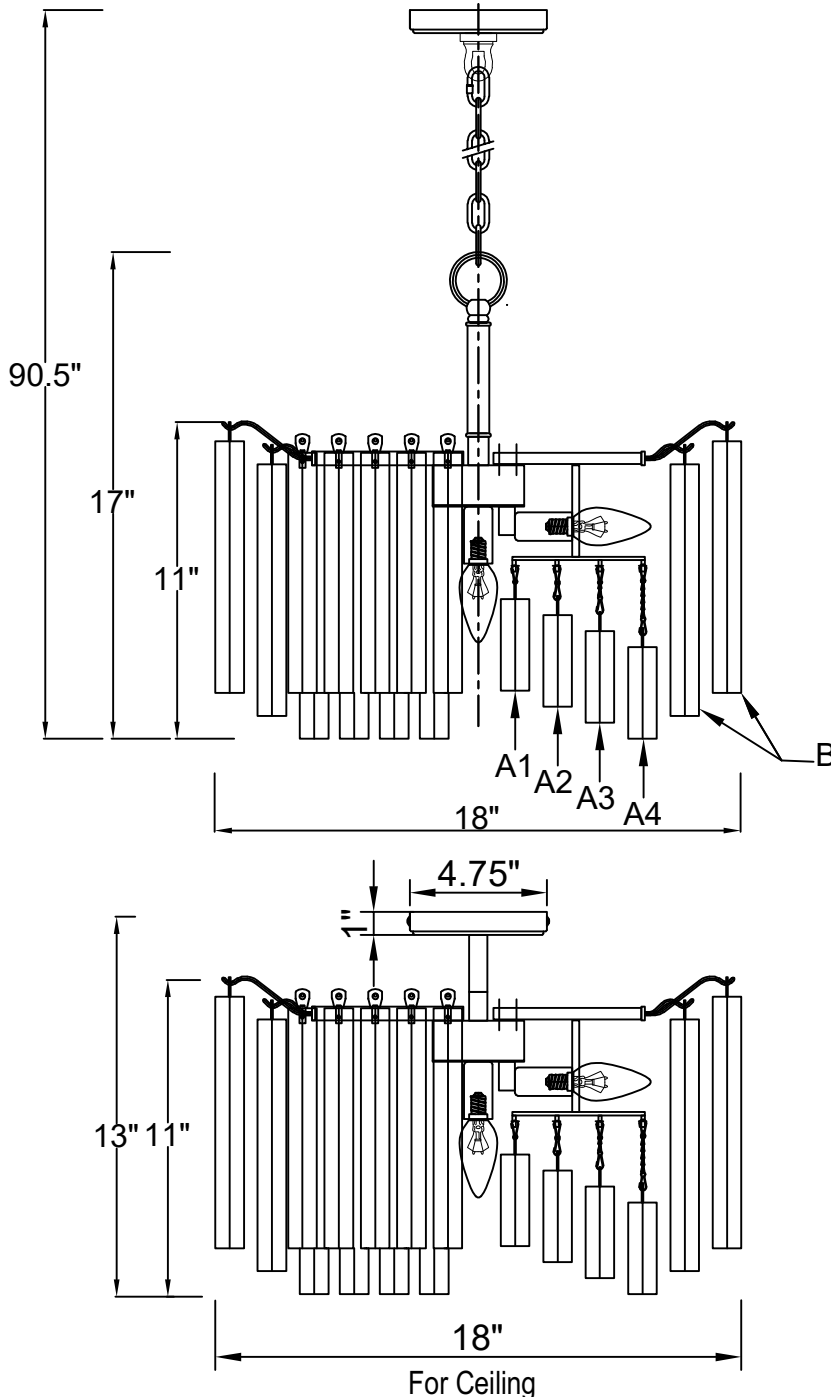

**All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.**



**You will need 5-Candelabra Base Bulb**

**40 Watts Recommended 60 Watts Max**

**USE LED BULBS FOR EXTENDED USE**

**This fixture is Dry rated**


### How to Install For Hanging:

1. Slip the wire through one check ring and the threaded pipe, then screw the threaded pipe into the coupler on the top of the frame. Slide the metal tube and another check ring over the threaded pipe and secure with the fixture loop.
2. Decide the preferred hanging height and choose the correct length of chain needed.
3. Install the mounting bar on the outlet box.
4. Raise the fixture up to the ceiling and do the wire connections. Secure the canopy over the outlet box using the collar ring.
5. Dress the crystals as illustrated.

### For Ceiling:

1. Screw the canopy for the ceiling mount onto the top of the frame.
2. Install the mounting plate onto the outlet box.
3. Raise the fixture up to the ceiling and do the wire connections. Secure the canopy over the mounting plate using the screws.

### DETAILED ILLUSTRATION

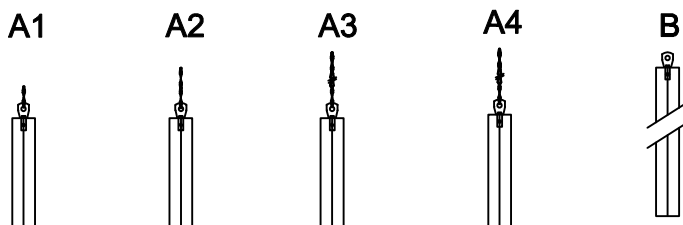

### Crystal Sets

- A1. 6Sets. (1)25x80mm + Chain&Pin Total length 107mm  
A2. 14Sets. (1)25x80mm + Chain&Pin Total length 121mm  
A3. 22Sets. (1)25x80mm + Chain&Pin Total length 135mm  
A4. 30Sets. (1)25x80mm + Chain&Pin Total length 149mm  
B. 80Sets. (1)25x220mm


**WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

**PART NUMBER**    **MODEL** #LOF-5005-PN

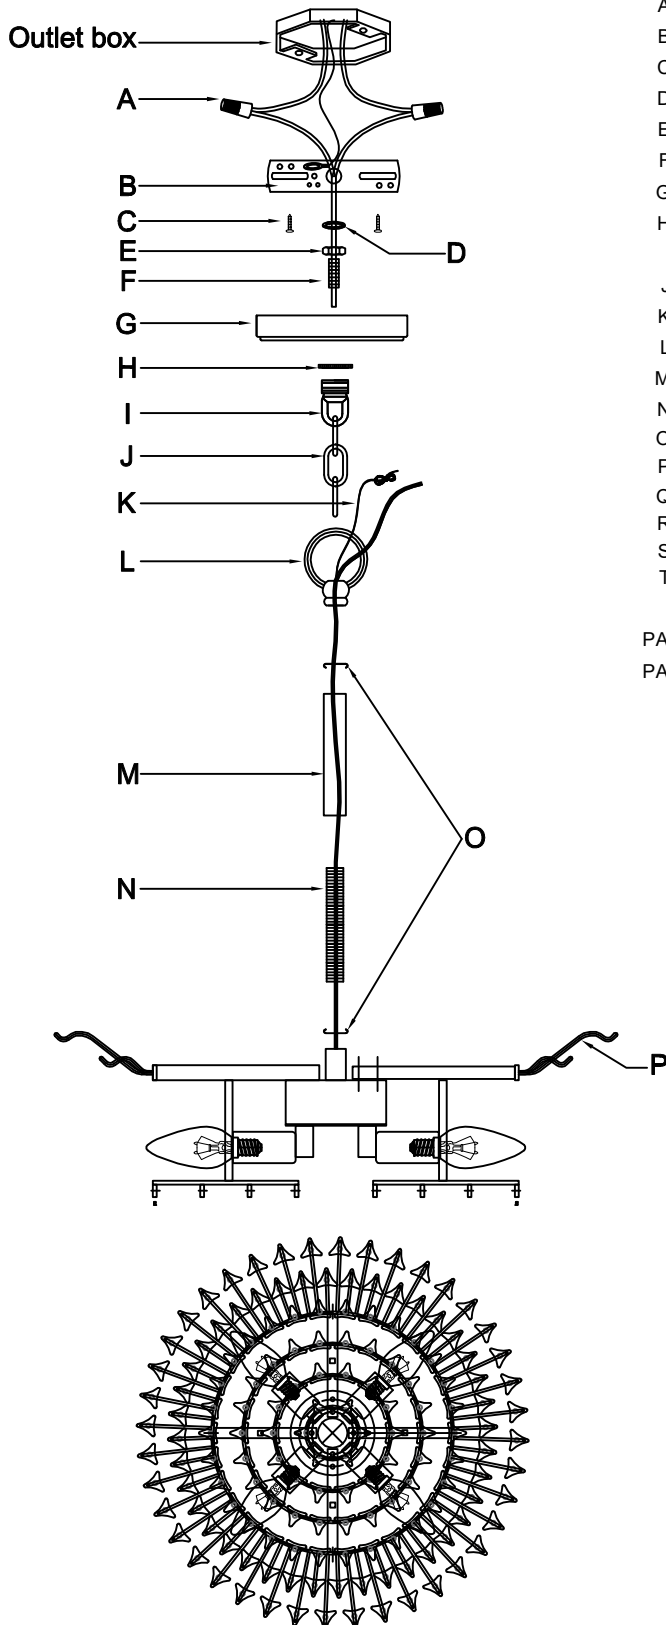


## Part Number

### Part Numbers

- A. (2)-Wire Connector
- B. (1)-Mounting Bar
- C. (2)-Outlet Box Screws
- D. (1)-Lock Washer
- E. (1)-Hex Nut
- F. (1)-Nipple
- G. (1)-Canopy; w4.75" x h1" (XFB5005PNCAN4.75IN)
- H. (1)-Collar Ring
- I. (1)-Collar Loop
- J. (1)-Chain; 72", 5mm (XFB5005PNCHA5MM)
- K. (1)-Ground Wire
- L. (1)-Fixture Loop
- M. (1)-Metal Tube; 4", 16MM thickness (XFB5005PNROD4IN)
- N. (1)-Threaded Pipe; 4.75", 12MM thickness
- O. (2)-Check Ring
- P. (1)-Frame
- Q. (1)-Mounting Plate for ceiling mount
- R. (2)-Screws
- S. (1)-Canopy for ceiling mount; w5" x h0.8", 13mm hole (XFB5005PNCAN4.75IN\_2)
- T. (1)-Metal Rod; 2", 16MM thickness (XFB5005PNROD2IN)

PART BAG I : Includes Parts A, C

PART BAG II : Includes Parts B, D, E, F, H, I

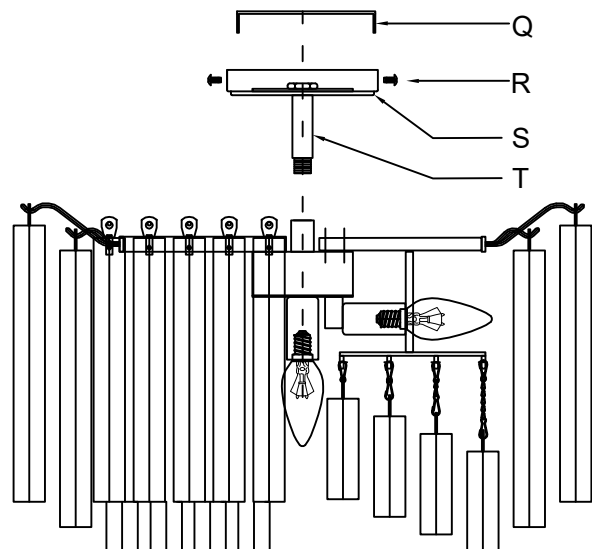

For Ceiling