


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

| | |
|---------------------------|---|
| ITEM NO.: DFC14 | NAME:HAMMONDS FLUSH MOUNT |
| MATERIAL TYPE: METAL,WOOD | FINISH:CHATTERED ENGLISH BRONZE,BLONDE,WHITE |
| SOCKET TYPE: E12 | SOCKET QTY: 2 |
| BULB WATTAGE: LED BULB 4W | |
| VOLTAGE: 110V-120V | ITEM NET WEIGHT: 3.7LBS |

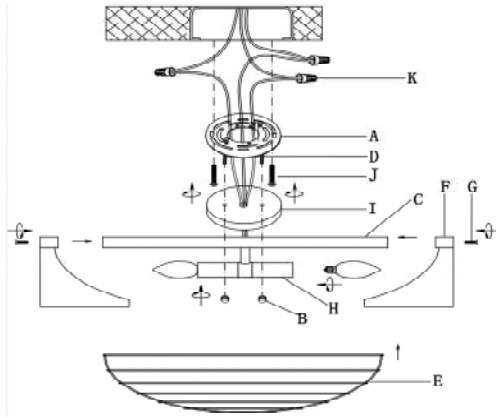

PARTS INCLUDED:

| | | | |
|--------------------|-----------|----------------------|----------|
| Mounting Plate (A) | Qty: 1Pc | Assembly Bracket (F) | Qty:2Pcs |
| Screw Nut (B) | Qty: 2Pcs | Side screw (G) | Qty:2Pcs |
| Canopy Plate (C) | Qty: 1Pc | Socket (H) | Qty:2Pcs |
| Screw Nut Pipe (D) | Qty: 2Pcs | Insulation Pad (I) | Qty:1Pc |
| Vellum Shade (E) | Qty:1Pc | | |

HARDWARE INCLUDED:

| | | | |
|---------------------------|------------|--------------------|-----------|
| Mounting Screws J | Qty : 2Pcs | Green Ground Screw | Qty : 1Pc |
| Plastic Wire Connector(K) | Qty : 3Pcs | | |

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove the assembly brackets (F) from the canopy plate by unscrewing the assembly screw (G).
5. Remove the mounting plate from the canopy plate by unscrewing the screw nut (B).
6. Carefully inspect the flush mount's fixture wires. Neutral fixture wire: White Hot fixture wire: Black Ground wire: Green
7. Wrap ground wire of flush mount and ground wire of junction box together and fasten together with a wire connector(K) and wrap the connection with electrical tape.
8. Attach the neutral fixture wire from the flush mount to the neutral junctionbox wire (usually white). Fasten each together with a connector(K) and wrap the connection with electrical tape.
9. Attach the hot fixture wire from the flush mount to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. Gently tuck the wire connections neatly into the ceiling junction box.
11. Place the mounting plate(A) and insulation pad (I) over the center of the ceiling junction box.
12. Align holes in mounting plate(A) and insulation pad (I) with holes in junction box and attach with two mounting bolts. Secure bolts with a Phillips head screwdriver.
13. Push canopy plate(C) up over the mounting plate(A) until it is flush with the ceiling, then tighten the screw nut (B) in a clockwise direction with screw nut pipe(D) to connect the canopy plate(C) and mounting plate(A).
14. Insert 2 TYPE-A 4W LED bulb(not included) into socket(H). **DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.**
15. Put vellum shade (E) into canopy plate(C) and then align holes of assembly bracket(F) with holes of canopy plate(C) and secure it with side screws(G) by using a slot type head screwdriver. Make sure the canopy plate(C) is flush with the ceiling.
16. Restore power to junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS