


ASSEMBLY AND INSTALLATION INSTRUCTIONS for the **844661** Fixture

Important Safety information (Please read before proceeding)

1. Remove the fixture, parts and all mounting hardware bags (orange) from the carton and verify that all parts are present according to the illustration sheet. All parts must be used as indicated. Do not replace any parts, leave any parts out, or use any parts which are worn out or broken. **Failure to follow the instructions could cause a hazardous situation, voids the warranty and violates the U.L. listing of the fixture.**
2. To prevent the electric shock, turn off the main power at the circuit breaker before installing the fixture. **NEVER attempt to install, clean or replace bulbs without shutting off the electricity to the fixture.**
3. **Never use light bulbs with wattage ratings that exceed the fixtures maximum rating.** Always make sure the electric current is turned off before changing the bulbs.
4. If you experience difficulties installing the lighting fixture or it fails to work as expected, please contact a local qualified licensed electrical contractor.
5. Please contact your local Capital Lighting Fixture reseller with any assembly or installation questions. Your local reseller can also provide you with replacement parts for your new fixture.

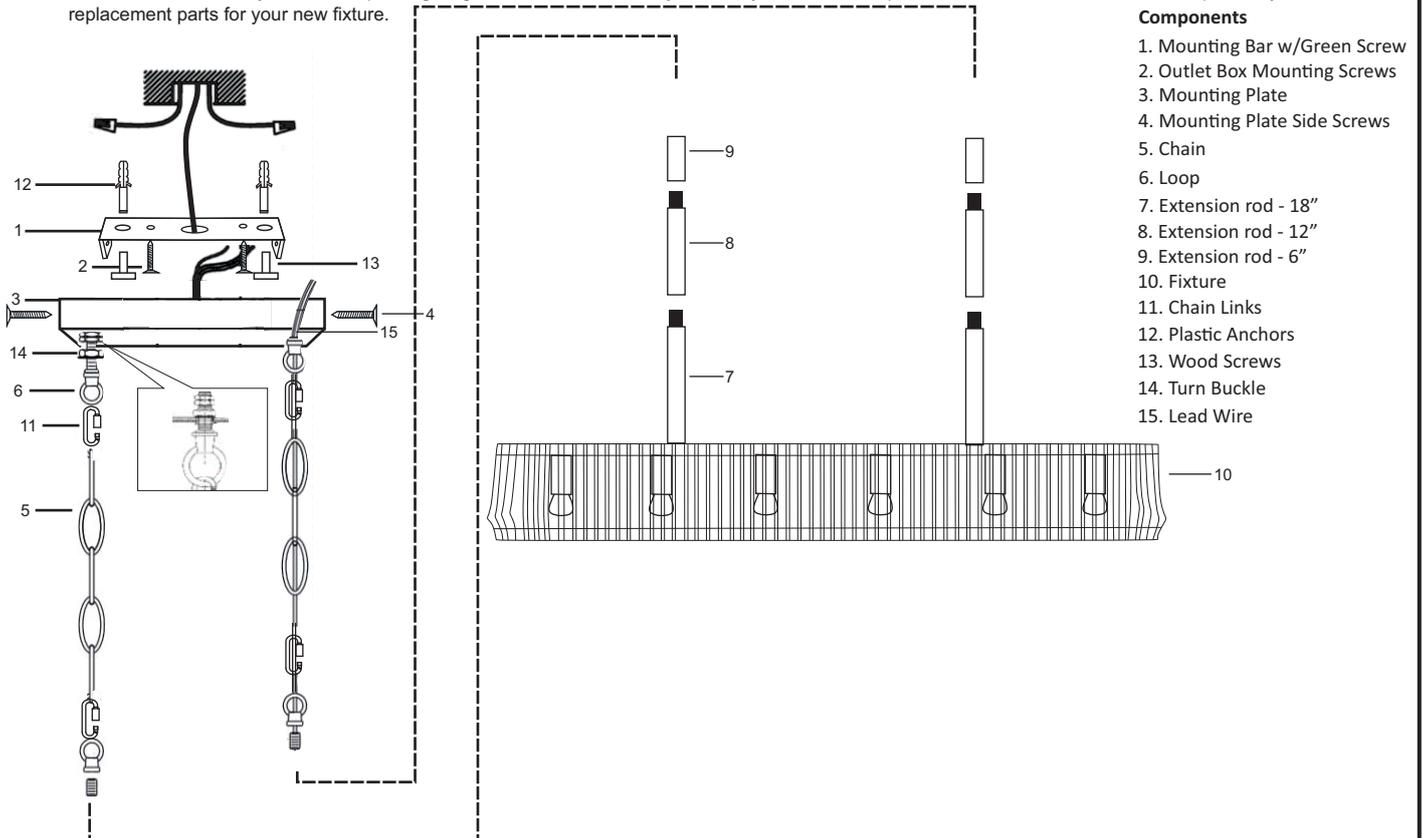

Assembly Instructions for the **844661** fixture

1. Pass lead wire from Fixture (10) through unassembled Rod (7), Rod (8), Rod (9), Loop (6), then screw all together. After that, repeat the same assembling steps for another side. *Note: The Fixture Height can be adjusted by varying the number of rods or chain used in the assembly.*
2. Pass Lead Wire (15) thru Chain (5), Loop (6) from Mounting Plate (3). Finally, connect all of them together. After that, repeat the same assembling steps for another side without wiring.
3. Find appropriate threaded holes on Mounting Bar (1), then assemble Mounting Bar (1) to mounting surface using hardware suitable for material of mounting surface. Mark position of holes on mounting surface before using provided Plastic Anchors (12), drill appropriate holes and assemble as illustrated.
4. Attach Mounting Bracket (1) to Outlet Box with Outlet Box Mounting Screws (2), and to mounting surface with wood Screws (13) tightly.
5. Raise whole Fixture (10) toward outlet box, then connect fixture ground wire to the outlet box ground wire with wire connector supplied; connect the common wire of the lamp cord to the power supply white wire with wire connector supplied; connect supply wire of the lamp cord to the power supply black wire with wire connector supplied. *Note: This fixture is wired using 2 conductor Lamp cord. The insulation between the two conductors on the lamp cord can be split down the center for better access to the two conductors. The common wire on the lamp cord is identified as the conductor with the printed marking and or the ribs embossed in the rubber wire insulation.*
6. Push fixture to ceiling, then verify all wires are securely inside Mounting Plate (3). Finally, secure Mounting Plate (3) in place by tightening Mounting Plate Side Screws (4) on to Mounting Bar (1).

Note: If the fixture is not leveled after hung, please adjust (screw) the Turn Buckle (14) up or down to help it.