


ASSEMBLY & INSTALLATION INSTRUCTIONS

B562

Geo Sconce 201550

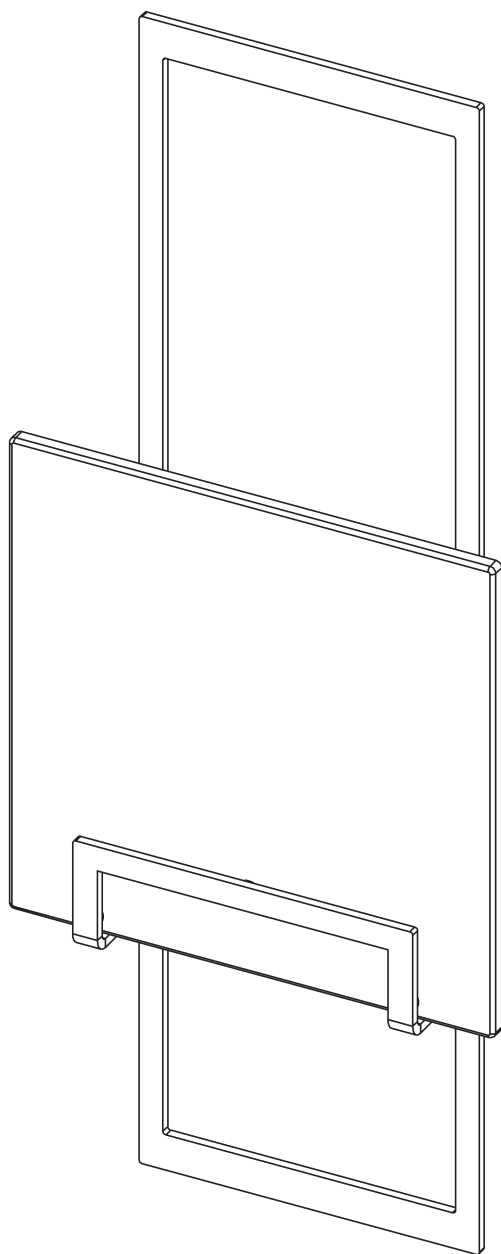

HUBBARDTON FORGE®

Component Parts

- A Fixture**
- B Mounting Bracket**
- C Ground Screw**
- D Cupped Washer**
- E #8 Screws (4)**
- F Socket**
- G Bulb (Not Included)**
- H Glass**
- I Thumb Screw (2)**
- J Threaded Tabs (2)**

ASSEMBLY & INSTALLATION INSTRUCTIONS

B562

Geo Sconce 201550

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND

PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Install Fixture (Figure 1)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture (A) from the carton.
2. Remove mounting bracket (B) from fixture (A).
3. Thread the wires from electrical box through hole in mounting bracket (B) while moving the bracket into position. Place mounting bracket over electrical box and secure with two machine screws (not provided).

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use.


4. Attach a pigtail lead to the mounting bracket (B) using the ground screw (C) and cupped washer (D) found in kit bag.
5. Hold fixture (A) close to wall. Using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green) together.

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

6. Place fixture (A) over mounting bracket (B). Secure with #8 screws (E) on top and bottom of fixture.

Note: Be sure no wires are pinched between fixture and wall

7. Follow steps on next page to complete installation.

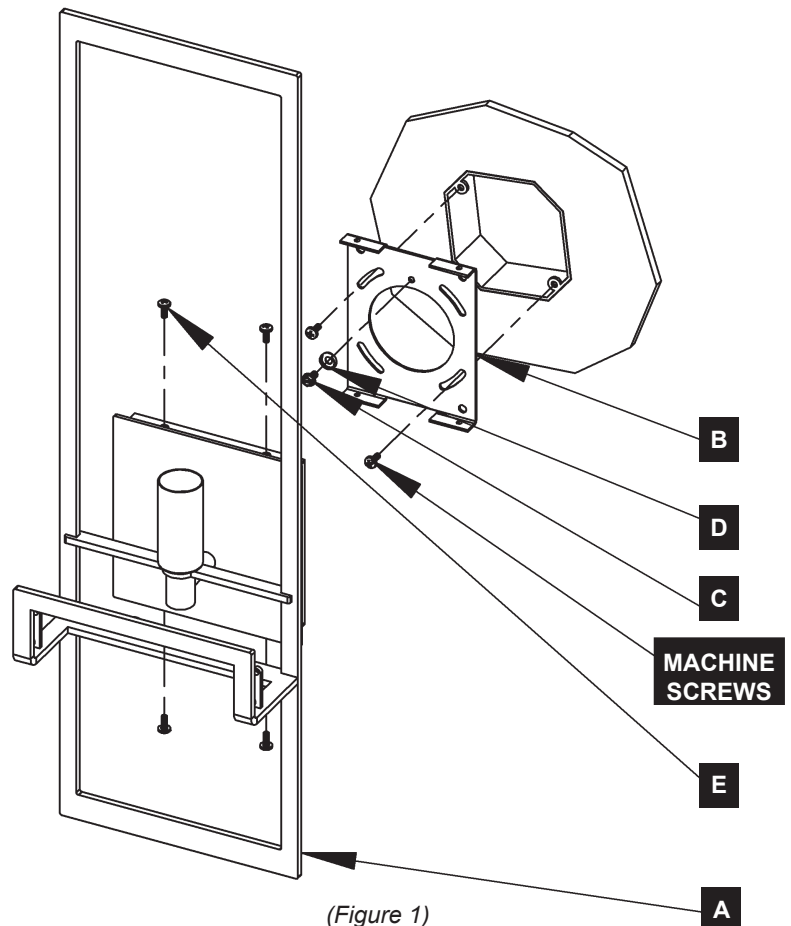

(Figure 1)




HUBBARDTON FORGE.

To Install Glass (Figure 2)

1. Install bulb (G), not included, into socket (F).
2. Carefully unpack glass (H).
3. Thumb screws (I) are shipped installed in threaded tabs (J). Loosen thumb screws before installing glass. It is not necessary to completely remove screws.
4. Slide glass (H) into fixture (A).
5. Tighten thumb screws (I) evenly to secure glass (H).

Note: *If spacers are needed to help glass sit correctly, we have supplied rubber bumpers and felt dots. Use as needed between fixture and glass.*

6. Restore electricity at main breaker.

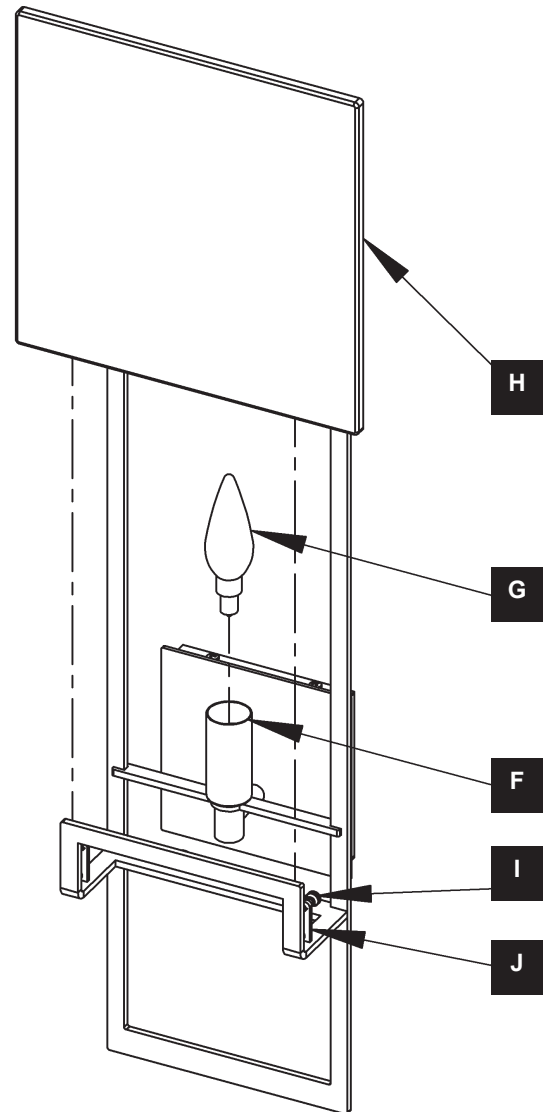

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**



HUBBARDTON FORGE.